




# SAFETY ADVISOR

AIR SAFETY INSTITUTE | 421 AVIATION WAY, FREDERICK, MD 21701 | 800.638.3101 | AIRSAFETYINSTITUTE.ORG

## COLD FACTS: WING CONTAMINATION

*DURING WINTER WEATHER, FROST AND SNOW OFTEN ACCUMULATES ON WINGS, ELEVATORS, AND OTHER SURFACES WHEN AN AIRCRAFT IS PARKED OUTSIDE ON THE RAMP.*

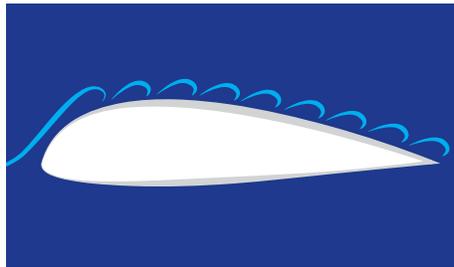

SMOOTH BOUNDARY LAYER AIRFLOW OVER AIRFOILS IS CRITICAL TO SAFE FLIGHT—DEGRADE IT WITH ANY SNOW, FROST, OR ICE AND FLIGHT MAY NOT HAPPEN.

Any unremoved frost or snow will disrupt airflow over the wings and substantially alter flight characteristics—increased stall speeds, longer takeoff rolls, or an inability to fly at all may be the result. Even a passing snow shower can foul surfaces enough to make flight inadvisable.

When faced with airframe and wing contamination, you have two choices: Go home, or spend some extra time during preflight **completely removing** frost and snow from the aircraft. While no Federal Aviation Regulations (FARs) specifically prohibit a light general aviation (GA) aircraft from attempting a takeoff while covered in snow or frost, doing so may fall under careless and reckless operation (FAR 91.13).



### CLEAN IT UP!

The best and easiest way to prevent contamination is to park the aircraft in a hangar.

In the highly regulated airline world the rule is simple: An aircraft can depart only when it's *clean*—no snow, frost, or ice on any part of the aircraft. GA pilots should use the same winter operations principle.

**Accident Record:** *During the last 10 years, there have been at least 25 accidents on takeoff as a result of wing contamination by snow, frost, and ice. A few simple steps during preflight could have easily prevented these accidents.*

If the aircraft is snow-covered, consider using soft bristle brooms or small snowbrushes. While effective, they can scratch paint, so use care. *Clean* towels or shop rags will also remove snow without scratching the paint.

The bad news is that underneath the snow there may be a layer of ice that also needs to be removed. Removing frost and ice is trickier than loose snow, but just as critical. The best tool is a heated hangar and an hour to spare. When melting the frost and ice make sure water does not penetrate control surface hinges where it might refreeze and cause problems.

*FROM AN AERODYNAMIC VIEWPOINT, THERE IS NO SUCH THING AS “A LITTLE ICE.”*

### NO HANGAR AVAILABLE? NO PROBLEM.

- **Glycol** is the most expensive and generally only available at select FBOs.
- **Polypropylene antifreeze** is pink in color and is available at RV, automotive, or marine stores. Placed in a small garden sprayer, it works quite well (especially if the sprayer is heated to room temperature). A note of caution, though: Composite aircraft owners should test it in an inconspicuous area first, as there have been reports of staining.
- **Automotive windshield deicer in a spray can** is inexpensive and can be purchased at gas stations and department stores. Do not use it on aircraft windshields or windows. It's the easiest to carry and, unless the airframe is heavily iced, will yield several applications.



LEFT: A GARDEN SPRAYER CAN BE USED TO HELP REMOVE FROST.

RIGHT: “HANGAR-IN-A-CAN” PRODUCTS ARE SMALL ENOUGH TO FIT IN A FLIGHT BAG.

- **Rubbing alcohol**, sold in relatively small quantities in drugstores and supermarkets, can work in a pinch using a spray bottle with a hand pump. With the exception of Glycol, these products are inexpensive to purchase and *should be used liberally. Remember, you want the aircraft to become airborne!*

Cleaning off the windshield is slightly different. Some pilots clear the aircraft's windshield by using a *clean* towel or shop rag. Other pilots start the airplane and wait for the defroster to do the job. This could take a while in cold weather at idle power. Both of these techniques work without damaging the windshield. **Do not** use car ice scrapers, credit cards, or any other hard plastic device to remove frost or snow from the windshield. Do not taxi until you can see enough to move safely. No cheating!

Finally, remember that do-it-yourself airframe decontamination will take a while, in cold, often windy conditions. A light flight jacket and tennis shoes, while stylish, do not work well. A parka, boots, gloves, and a hat will encourage you to give this critical job the time and attention it deserves.

#### **LEARN MORE**

Check out ASI's Icing and Cold Weather Ops Safety Spotlight  
[airsafetyinstitute.org/safety-spotlights/cold-weather](http://airsafetyinstitute.org/safety-spotlights/cold-weather)

Access the Air Safety Institute accident database  
[airsafetyinstitute.org/database](http://airsafetyinstitute.org/database)



**AIR SAFETY INSTITUTE**  
421 AVIATION WAY  
FREDERICK, MD 21701  
800.638.3101  
[AIRSAFETYINSTITUTE.ORG](http://AIRSAFETYINSTITUTE.ORG)

© COPYRIGHT 2014 AOPA AIR SAFETY INSTITUTE