


| | | | |
|---|------------------------|-----------------------------|---|
| LOC/DME I-ALN 108.5 Chan 22 | APP CRS 294° | Rwy Idg TDZE Apt Elev | 8099 531 544 |
|---|------------------------|-----------------------------|---|

ILS or LOC RWY 29

ST LOUIS RGNL (ALN)


| | | | | | |
|--|---------------|--|--------------------------|--|--|
| <p>For inop ALS, increase WULIB fix minimums S-LOC 29 Cats C/D visibility to 1 SM.</p> | <p>MALS R</p> | <p>MISSED APPROACH: Climb to 1000 then climbing right turn to 2200 on heading 310° and on TOY VORTAC R-322 to TOPAZ INT/TOY 16 DME and hold.</p> | | | |
| | | | <p>ATIS 128.0</p> | <p>ST LOUIS APP CON 124.2 353.9</p> | <p>REGIONAL TOWER* 126.0 (CTAF) 0 239.0</p> |

| | | | | | |
|-------------------|-------------------------------------|---|----------------------|--|----------------------|
| ATIS 128.0 | ST LOUIS APP CON 124.2 353.9 | REGIONAL TOWER* 126.0 (CTAF) 0 239.0 | GND CON 120.2 | CLNC DEL 120.2 (when tower closed) | UNICOM 122.95 |
|-------------------|-------------------------------------|---|----------------------|--|----------------------|

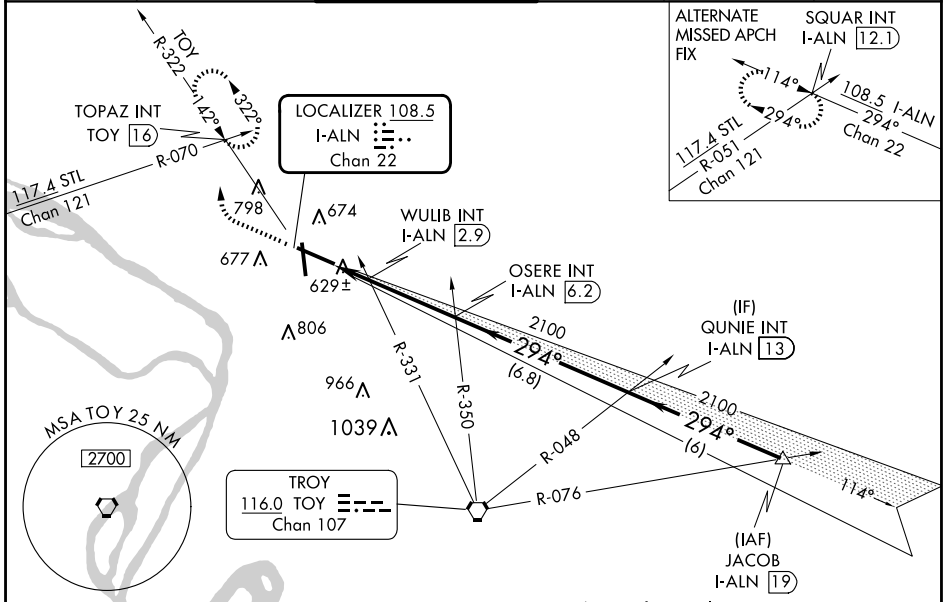

| | | |
|-----------------|----------|-----------------|
| ELEV 544 | D | TDZE 531 |
|-----------------|----------|-----------------|

Procedure NA for arrivals at JACOB on V12 northeast bound.

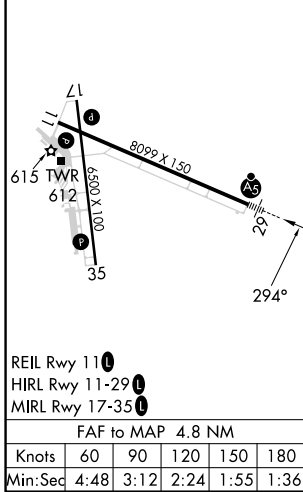

| | | | | | | | | |
|---|------|---------|---------------|-----------------|---------------------|---------------------|----------------|-----------------|
| | 1000 | 2200 | TOY R-322 | TOPAZ INT | *LOC only. | | | |
| | | | hdg 310° | | OSERE INT I-ALN 6.2 | QUNIE INT I-ALN 13 | JACOB I-ALN 19 | |
| | | | | | I-ALN 1.5 | WULIB INT I-ALN 2.9 | 2100 | 2100 |
| | | | | | | | 2100 | 2100 |
| | | | | | | | 2100 | GS 3.00° TCH 55 |
| | | | | | 1.4 NM | 3.3 NM | 6.8 NM | 6 NM |
| CATEGORY | | A | B | C | D | | | |
| S-ILS 29 | | 731-1/2 | | | | 200 (200-1/2) | | |
| S-LOC 29 | | 980-1/2 | 449 (500-1/2) | 980-7/8 | | 449 (500-7/8) | | |
| CIRCLING | | 1000-1 | 456 (500-1) | 1160-1 3/4 | | 1200-2 | | |
| | | | | 616 (700-1 3/4) | | 656 (700-2) | | |
| WULIB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) | | | | | | | | |
| S-LOC 29 | | 880-1/2 | 349 (400-1/2) | 880-5/8 | | 349 (400-5/8) | | |
| CIRCLING | | 1000-1 | 456 (500-1) | 1160-1 3/4 | | 1200-2 | | |
| | | | | 616 (700-1 3/4) | | 656 (700-2) | | |

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025