



WAAS CH 97737 W07A	APP CRS 068°	Rwy Idg TDZE 966 Apt Elev 966	3900
--	------------------------	---	-------------

RNAV (GPS) RWY 7

BOLOYER FLD (Y72)

RNP APCH - GPS
 Obtain local altimeter setting on CTAF, when not received, use CMY altimeter setting and increase all MDAs 20 feet, increase LNAV visibility Cat C 1/2 SM.
 NA Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.
 MISSED APPROACH: Climb to 3000 direct GLAKE and hold.

VOLK APP CON 135.25 244.875	VOLK CTAF 127.5	CTAF 122.9
---------------------------------------	---------------------------	----------------------

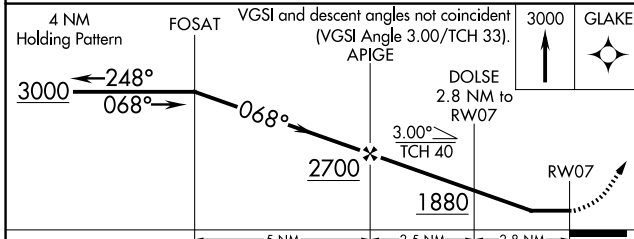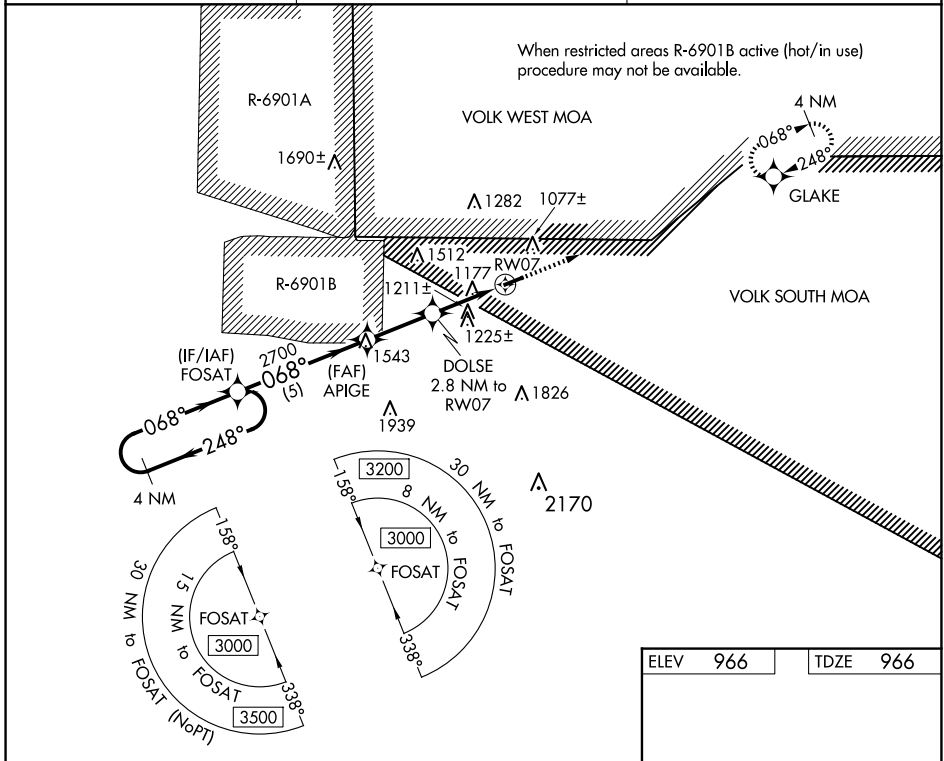

ELEV 966	TDZE 966
----------	----------

3900 X 75

068°

RW07

MIRL Rwy 7-25

REIL Rwy 7 and 25

CATEGORY	A	B	C	D
LP MDA	1460-1	494 (500-1)	1460-1 3/8 494 (500-1 3/8)	NA
LNAV MDA	1500-1	534 (600-1)	1500-1 1/2 534 (600-1 1/2)	NA
C CIRCLING	1540-1 574 (600-1)	1560-1 594 (600-1)	1660-2 694 (700-2)	NA

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025