


VOR/DME STC	APP CRS	Rwy Ldg TDZE	7000 1020
112.1	320°	Apt Elev	1031
Chan 58			

VOR RWY 31


ST CLOUD RGNL (STC)

For inop ALS, increase S-31 Cat C and D visibility to 1½ SM.	MALSR MISSED APPROACH: Climb to 2700 then right turn direct STC VOR/DME and hold.
---	---

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
-----------------	--------------------------------------	--------------------------------------	-------------------

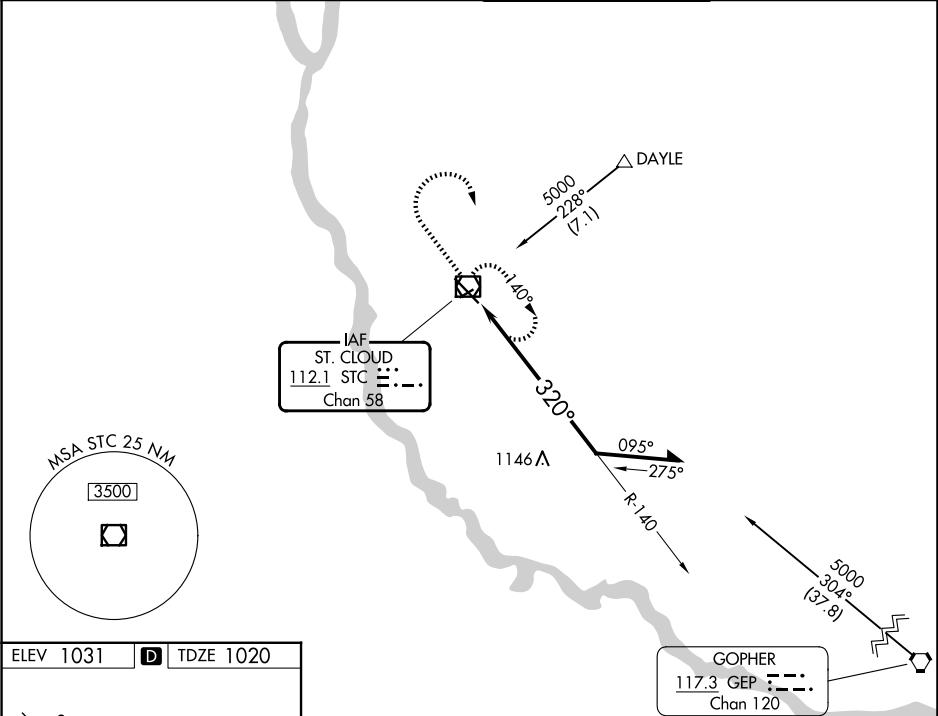

ELEV 1031	D	TDZE 1020
-----------	---	-----------

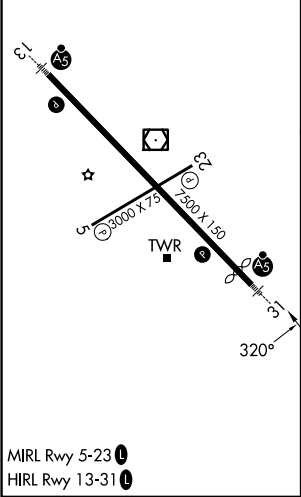

2700	STC	STC VOR/DME	Remain within 10 NM	
140°	2700	STC 1.9	320°	
1.2 NM	1.2 NM	1.2 NM	1.2 NM	
CATEGORY	A	B	C	D
S-31	1460-½	440 (500-½)	1460-¾ 440 (500-¾)	1460-1 440 (500-1)
CIRCLING	1500-1	469 (500-1)	1620-1½ 589 (600-1½)	1860-2¾ 829 (900-2¾)