


WAAS CH 90132 W06A	APP CRS 060°	Rwy ldg TDZE Apt Elev	5188 586 592
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

NIAGARA FALLS INTL (IAG)

RNP APCH. Baro-VNAV NA when using Buffalo Niagara Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all DA 51 feet and all MDA 60 feet, increase LNAV Cat C and D visibility ½ SM and Circling Cat C and D ¼ SM. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Straight-in Rwy 6 NA at night, Circling Rwy 6, 10R, 24, 28L NA at night.				MISSED APPROACH: Climb to 3600 direct ZUPOV and hold.	
ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER* 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	CLNC DEL 119.25 251.1	UNICOM 122.95

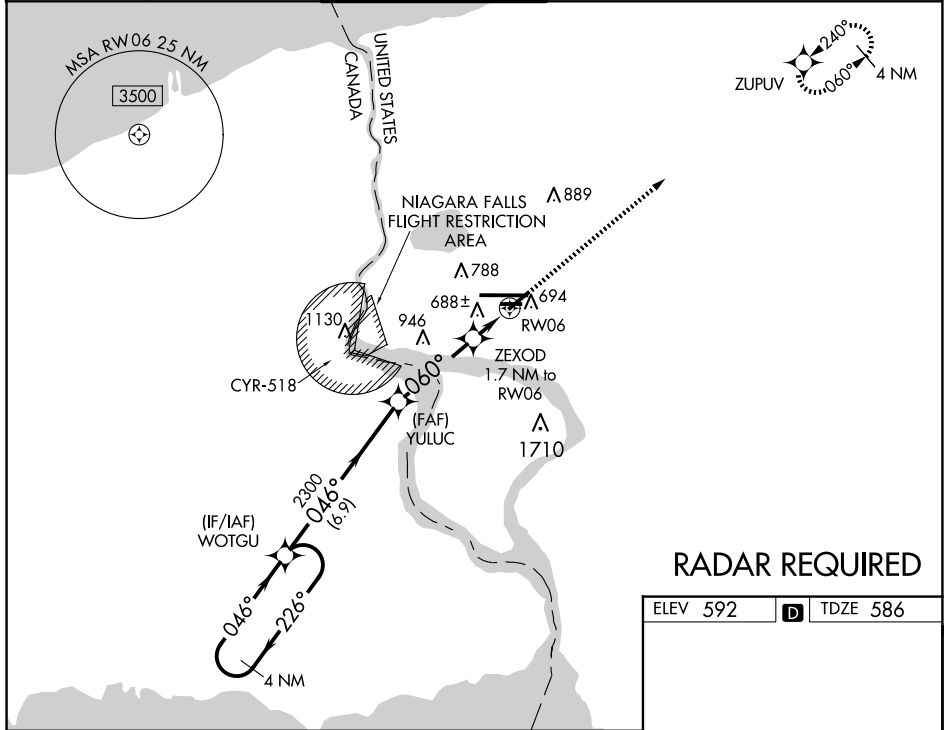

RADAR REQUIRED

ELEV 592	D TDZE 586
----------	-------------------

4 NM Holding Pattern	WOTGU	YULUC	ZEXOD 1.7 NM to RW06	RW06	3600 ZUPOV
3300 ← 226° / 046° →	2300	2300	1180		* LNAV only
GP 3.00° TCH 55	6.9 NM	3.5 NM	1.7 NM		
CATEGORY	A	B	C	D	
LPV DA		864-1	278 (300-1)		
LNAV/VNAV DA		849-1	263 (300-1)		
LNAV MDA		940-1	354 (400-1)		
C CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	

- TDZ/CL Rwy 28R **0**
- REIL Rwys 6, 10R, 24, and 28L **0**
- HIRL Rwy 10L-28R **0**
- MIRL Rwys 6-24 and 10R-28L **0**