WAAS	APP CRS	Rwy Idg	7610
CH **81816**	**285°**	TDZE	**2858**
W28A		Apt Elev	**2872**

RNAV (GPS) RWY 28

MIDLAND INTL AIR AND SPACE PORT (MAF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA. Inop table does not apply to LPV all Cats.

MALS

MISSED APPROACH: Climb to 5000 direct JEMMO and hold.

ATIS	MIDLAND APP CON ★	MIDLAND TOWER ★	GND CON	CLNC DEL	UNICOM
126.8 235.975	124.6 290.4	118.7 (CTAF) L 273.45	121.9 348.6	118.05 317.65	122.95

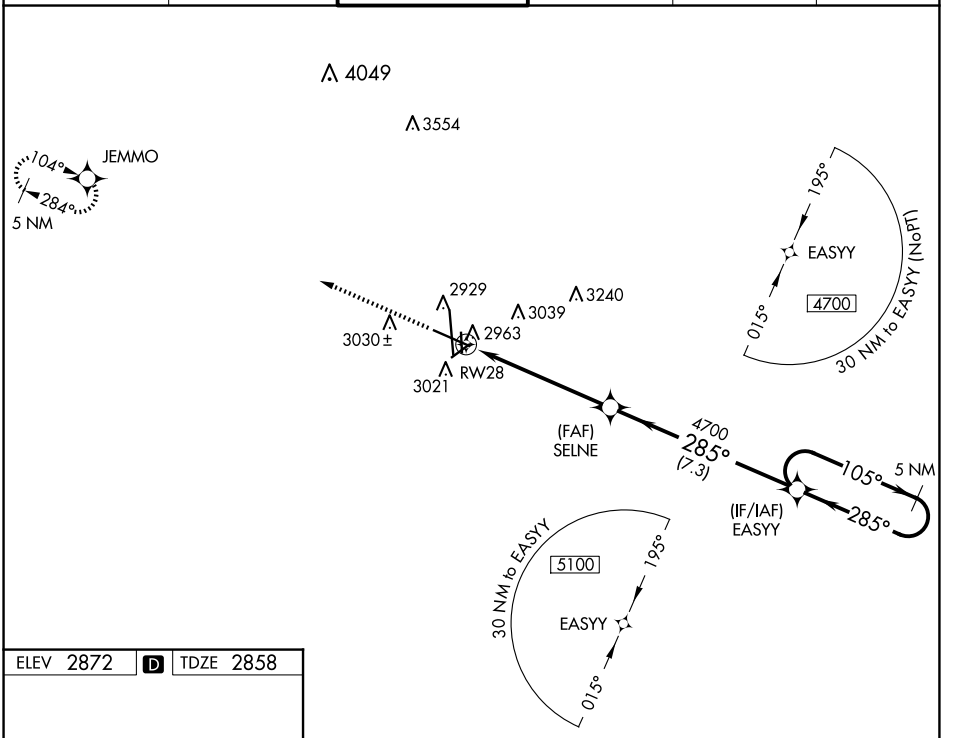

ELEV 2872 D TDZE 2858



REIL Rwy 34L
MIRL Rwys 4-22 and 16L-34R L
HIRL Rwys 10-28 and 16R-34L

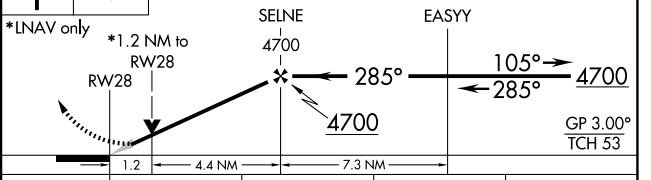

CATEGORY	A	B	C	D
LPV DA	3058-¾ 200 (200-¾)			
LNAV/VNAV DA	3271-1⅛ 413 (500-1⅛)			
LNAV MDA	3280-¾ 422 (500-¾)		3280-1 422 (500-1)	
CIRCLING	3440-1 568 (600-1)		3440-1½ 568 (600-1½)	3520-2 648 (700-2)

SC-3, 15 MAY 2025 to 12 JUN 2025
SC-3, 15 MAY 2025 to 12 JUN 2025