


WAAS CH 45913 W14A	APP CRS 141°	Rwy Idg TDZE Apt Elev	8118 258 258
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 14

SHREVEPORT RGNL (SHV)

RNP APCH.		ALSIF-2		MISSED APPROACH: Climb to 3000 direct COBAV and hold, continue to climb-in-hold to 3000.	
<p>▼ For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.</p> <p>▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.</p>					
ATIS 128.45	SHREVEPORT APP CON 119.9 335.55	SHREVEPORT TOWER 121.4 236.775	GND CON 121.175 236.775	CLNC DEL 124.65	

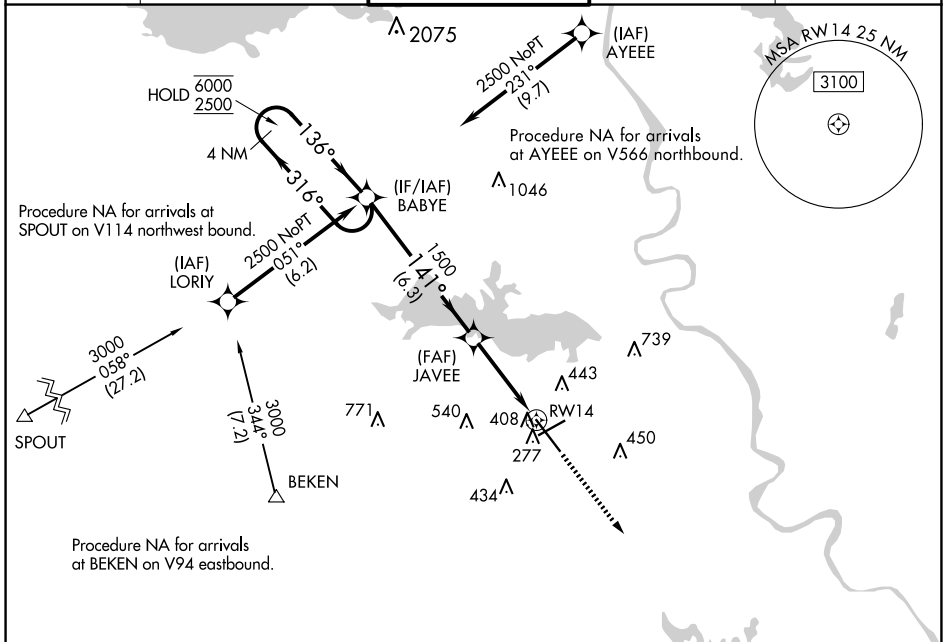

ELEV 258	D	TDZE 258
----------	----------	----------

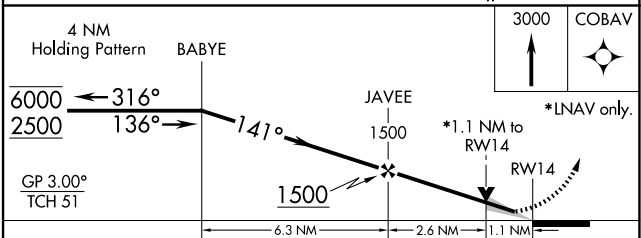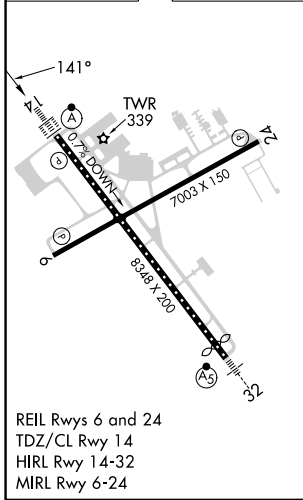

CATEGORY	A	B	C	D
LPV DA		458/18	200 (200-½)	
LNAV/VNAV DA		640/40	382 (400-¾)	
LNAV MDA	660/24	402 (500-½)	660/40	402 (500-¾)
C CIRCLING	760-1	502 (600-1)	980-2 722 (800-2)	1100-2¾ 842 (900-2¾)

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025