


| | | | |
|--------------------------|-----------------|-----------------------------|--------------------|
| WAAS CH 45526 W05A | APP CRS 052° | Rwy Idg TDZE Apt Elev | 7001 228 236 |
|--------------------------|-----------------|-----------------------------|--------------------|

RNAV (GPS) RWY 5



COLUMBIA METRO (CAE)

| | | | |
|---|--|-----------|--|
| RNP APCH - GPS | | MALSR | MISSED APPROACH: Climb to 2400 direct POMIE and on track 018° to BEFTY and hold. |
| <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1/2 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.</p> | | | |

| | | | | |
|----------------|---|-------------------------------|------------------------|--------------------|
| ATIS 120.15 | COLUMBIA APP CON 133.4 285.6 (290°-109°) 124.15 338.2 (110°-289°) | COLUMBIA TOWER 119.5 257.8 | GND CON 121.9 348.6 | CLNC DEL 119.75 |
|----------------|---|-------------------------------|------------------------|--------------------|

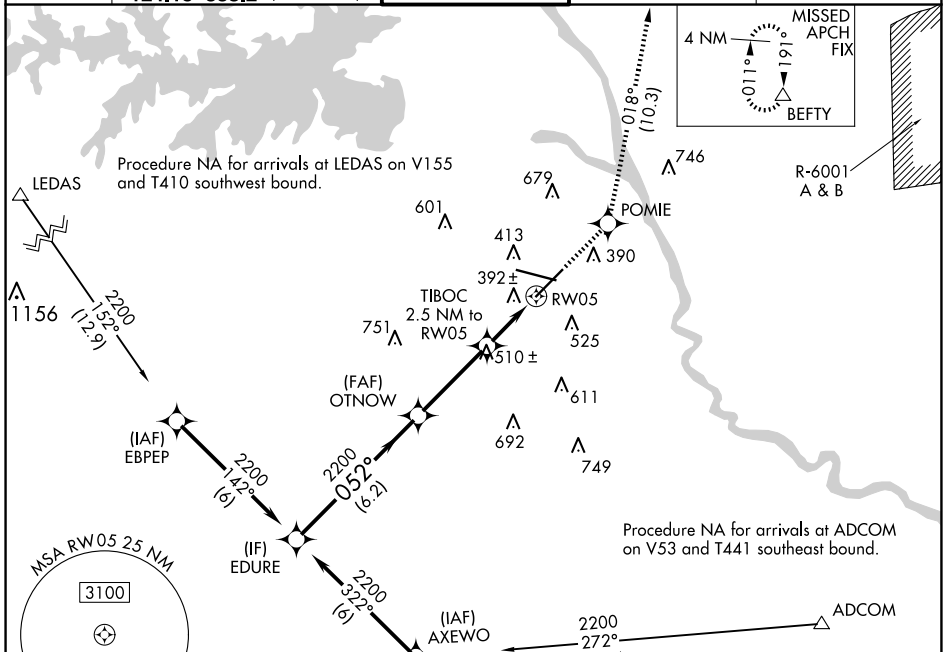

| | |
|----------|----------|
| ELEV 236 | TDZE 228 |
|----------|----------|

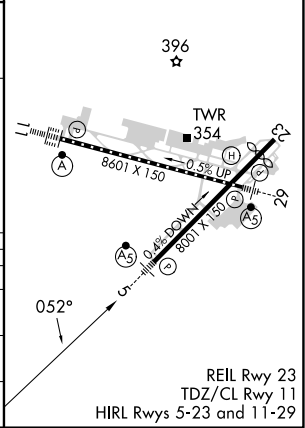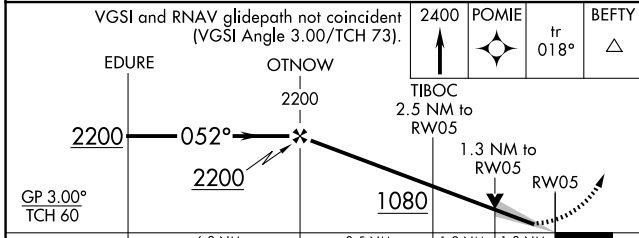

| | | | | |
|--------------|----------------------|----------------------|-------------------------------|-------------------------------|
| CATEGORY | A | B | C | D |
| LPV DA* | 428/24 200 (200-1/2) | | | |
| LNAV/VNAV DA | 638/40 410 (500-3/4) | | | |
| LNAV MDA | 700/24 472 (500-1/2) | 700/50 472 (500-1) | | |
| CIRCLING | 740-1 504 (600-1) | 860-1 624 (700-1) | 1040-2 1/4 804 (900-2 1/4) | 1040-2 1/2 804 (900-2 1/2) |

SE-2, 15 MAY 2025 to 12 JUN 2025

SE-2, 15 MAY 2025 to 12 JUN 2025