

LOM RU 275	APP CRS 202°	Rwy Idg TDZE Apt Elev	5501 772 772
----------------------	------------------------	-----------------------------	---




NDB RWY 20
MID-CAROLINA RGNL (RUQ)

▽ When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet, increase S-20 Cats C and D, and Circling Cat C visibility 1/8 SM and Circling Cat D 1/4 SM. For inop ALS, increase Cat D visibility to 1 7/8 SM. For inop ALS when using Lexington altimeter setting increase Cat D visibility to 2 SM.

△NA

MALS **MISSED APPROACH:** Climb to 1800 then climbing right turn to 2500 direct ROVDY LOM and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF)
--------------------------	---	---------------------------	---------------------------------

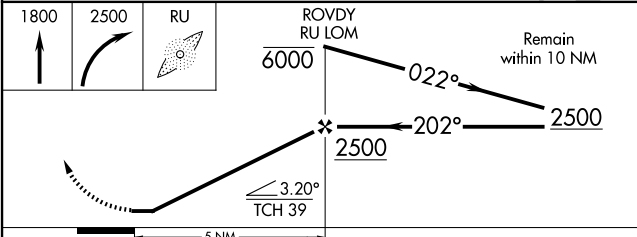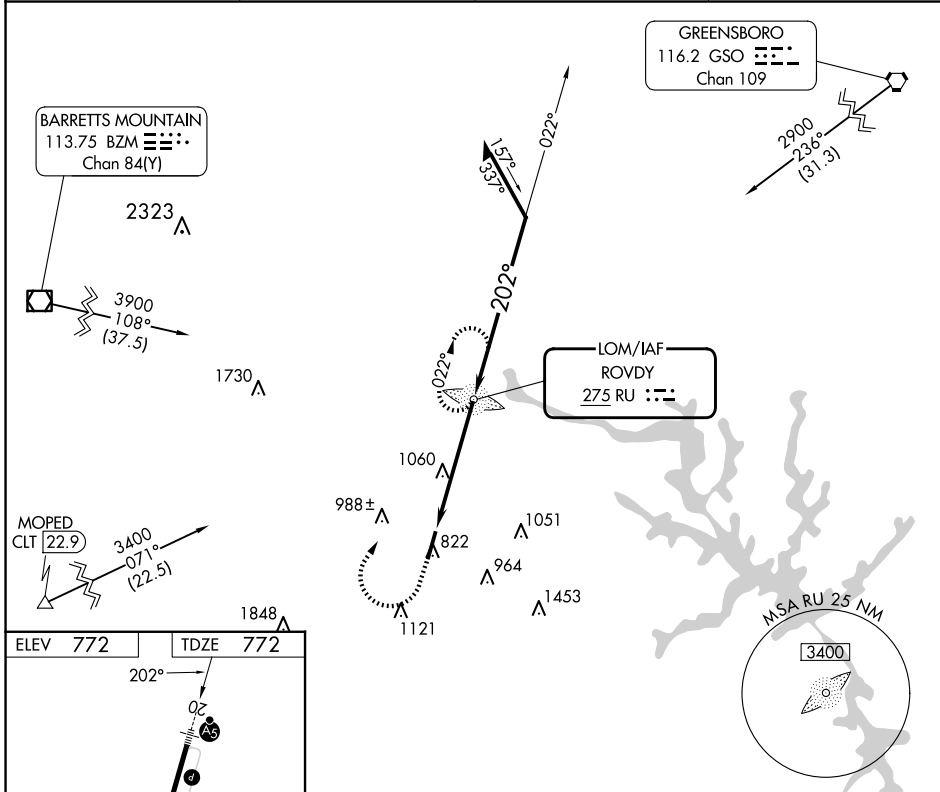

	A		B		C		D	
S-20	1420-3/4	648 (700-3/4)	1420-1 1/8	648 (700-1 1/8)	1440-1 7/8	668 (700-1 7/8)	1440-2	668 (700-2)
☑ CIRCLING	1420-1	648 (700-1)	1440-1 7/8	668 (700-1 7/8)	1440-2	668 (700-2)		

SE-2, 15 MAY 2025 to 12 JUN 2025

SE-2, 15 MAY 2025 to 12 JUN 2025