

| | | |
|--|------------------------|---|
| WAAS CH 40405 W09A | APP CRS 093° | Rwy Idg 4801 TDZE 3 Apt Elev 3 |
|--|------------------------|---|

RNAV (GPS) RWY 9


KEY WEST INTL (EYW)

RNP APCH-GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C.
▲ Rwy 9 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using
W NQX altimeter setting. When local altimeter setting not received, use NQX altimeter setting.

MISSED APPROACH:
Climb to 2000 direct BURPY and hold.



| | | | | | |
|------------------------|---|---|-------------------------|--------------------------|-------------------------|
| ATIS 119.675 | NAVY KEY WEST APP CON * 124.025 313.7 | KEY WEST TOWER * 118.2 (CTAF) 257.8 | GND CON 121.9 | CLNC DEL 121.9 | UNICOM 122.95 |
|------------------------|---|---|-------------------------|--------------------------|-------------------------|

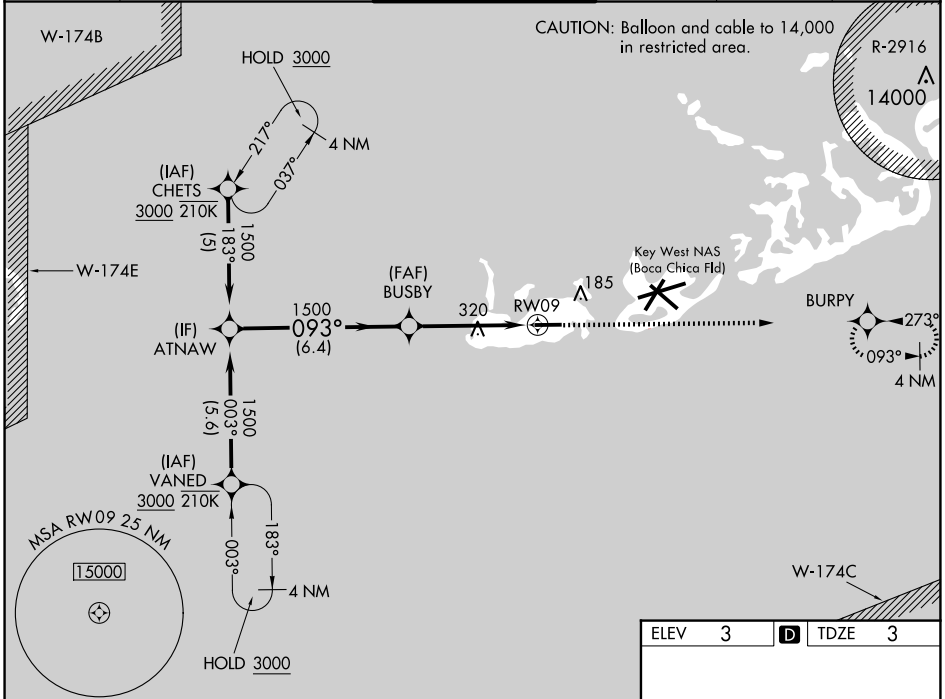

SE-3, 15 MAY 2025 to 12 JUN 2025

SE-3, 15 MAY 2025 to 12 JUN 2025

| | |
|---------------|------------------------|
| ELEV 3 | D TDZE 3 |
|---------------|------------------------|

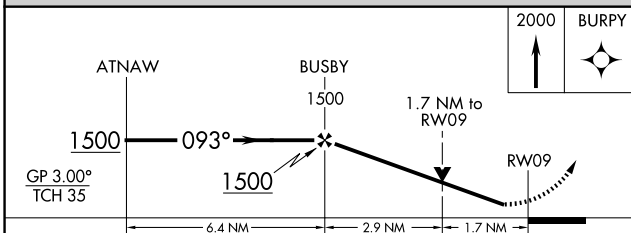

| CATEGORY | A | B | C | D |
|--------------|-----------|-------------|------------------------------|----------------------|
| LPV DA | 253-1 | | 250 (300-1) | |
| LNAV/VNAV DA | 425-1 1/4 | | 422 (500-1 1/4) | |
| LNAV MDA | 580-1 | 577 (600-1) | 580-1 5/8 | 577 (600-1 5/8) |
| CIRCLING | 580-1 | 577 (600-1) | 620-1 3/4 617 (700-1 3/4) | 620-2 617 (700-2) |

MIRL Rwy 9-27 **1**
REIL Rws 9 and 27 **1**