

VORTAC EUF 109.2 Chan 29	APP CRS 187°	Rwy Idg 5000 TDZE 285 Apt Elev 285
---------------------------------------	------------------------	---------------------------------------------------------------


VOR RWY 18

WEEDON FLD (EUF)



NA When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Increase AFENY fix minimums S-18 visibility Cats C and D ¼ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	ATLANTA APP CON * 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF)
------------------------	-----------------------------------------	---------------------------------	-------------------------------

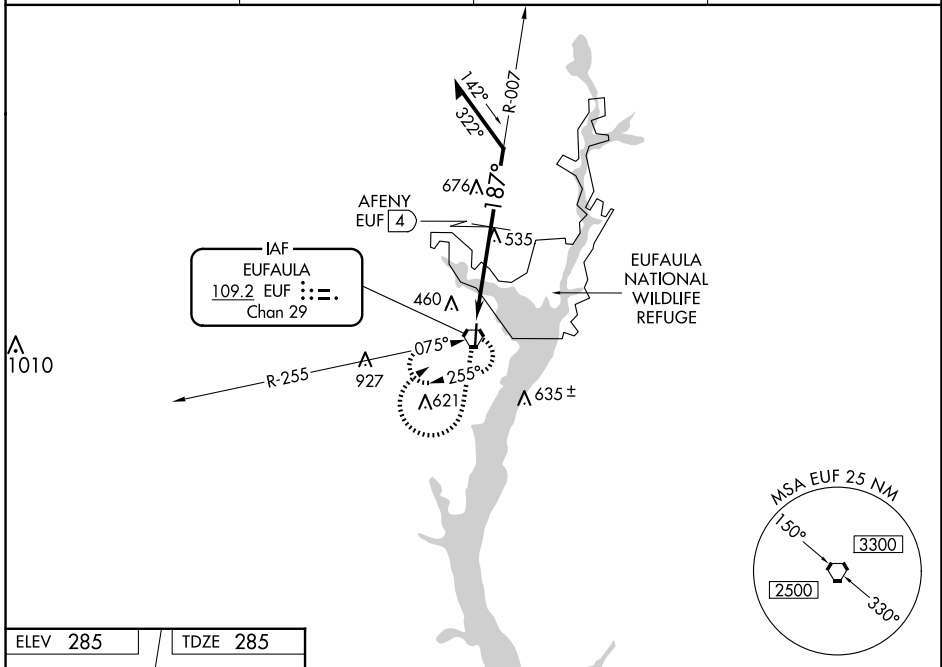

ELEV 285	TDZE 285
----------	----------

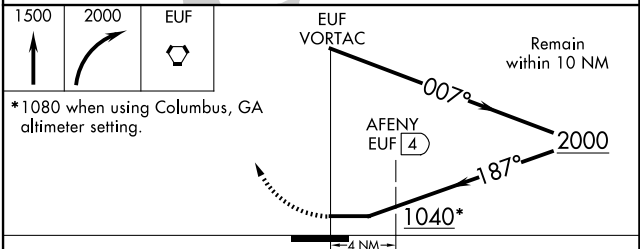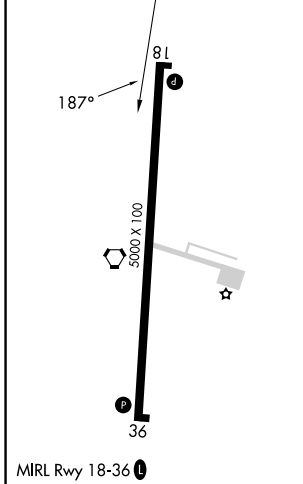

CATEGORY	A	B	C	D
S-18	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1040-2	755 (800-2)
CIRCLING	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)
AFENY FIX MINIMUMS (DME REQUIRED)				
S-18	900-1	615 (700-1)	900-1¾	615 (700-1¾)
CIRCLING	920-1	635 (700-1)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)

SE-4, 15 MAY 2025 to 12 JUN 2025

SE-4, 15 MAY 2025 to 12 JUN 2025