WAAS	APP CRS	Rwy Idg	7280
CH 49237	095°	TDZE	17
W09A		Apt Elev	17

RNAV (GPS) RWY 9

SAN DIEGO INTL (SAN)

RNP APCH.

Circling NA north of Rwy 9-27. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 47°C. When Circling to Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 9 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cats A/B visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct CAPUS and hold.

D-ATIS	SOCAL APP CON	LINDBERGH TOWER	GND CON	CLNC DEL	CPDLC
134.8	119.6 363.1 (WEST) 124.35 279.625 (EAST)	118.3 338.225	123.9	125.9	

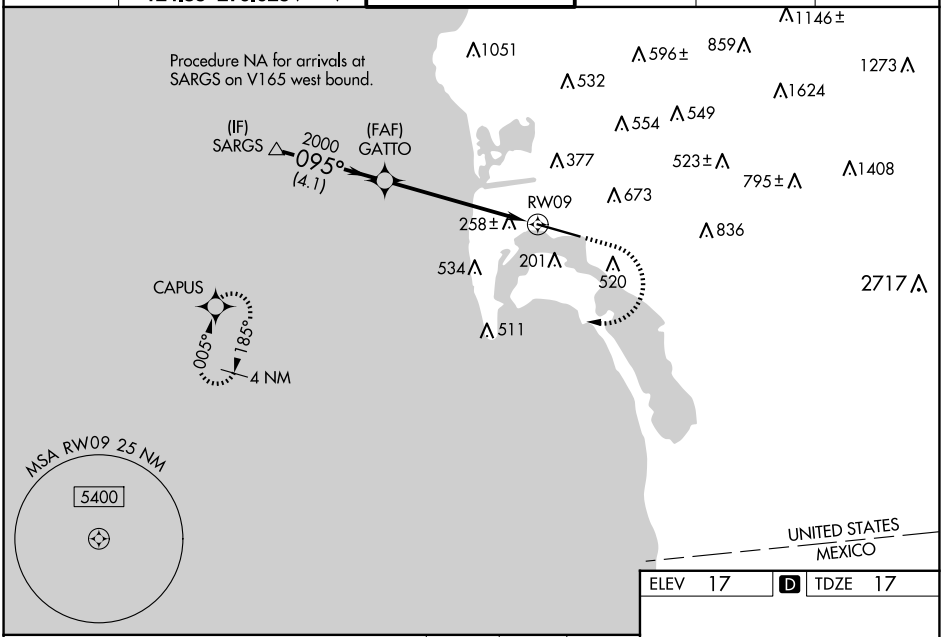

ELEV 17 | D | TDZE 17

VGSI and RNAV glidepath not coincident (VGSI Angle 3.30/TCH 76).

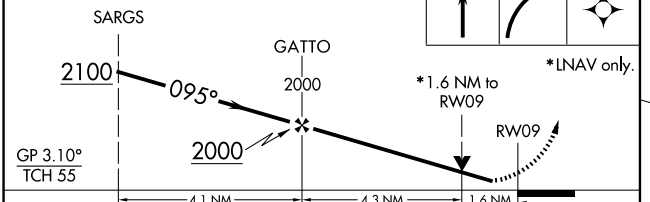



CATEGORY	A	B	C	D
LPV DA	262/40	245 (300-¾)		
LNAV/VNAV DA	621-1½	604 (700-1½)		
LNAV MDA	600/40	583 (600-¾)	600-1¼	583 (600-1¼)
C CIRCLING	800-1 783 (800-1)	820-1 803 (900-1)	820-2¼ 803 (900-2¼)	940-3 923 (1000-3)

TDZ/CL Rwys 9 and 27
HIRL Rwy 9-27

SW-3, 15 MAY 2025 to 12 JUN 2025
SW-3, 15 MAY 2025 to 12 JUN 2025