

| | | | |
|---|------------------------|-----------------------------|---|
| LOC/DME I-EVV 109.9 Chan 36 | APP CRS 221° | Rwy Idg TDZE Apt Elev | 8021 422 422 |
|---|------------------------|-----------------------------|---|

ILS or LOC RWY 22

EVANSVILLE RGNL (E V V)



RADAR or DME required for procedure entry at AUGUS.

⚠ Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or Huts C and D.






MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

| | | | | | |
|----------------------|--|---|-------------------------|--------------------------|-------------------------|
| ATIS 120.2 | EVANSVILLE APP CON ★ 124.025 290.9 | EVANSVILLE TOWER ★ 118.7 (CTAF) 257.8 | GND CON 121.9 | CLNC DEL 126.6 | UNICOM 122.95 |
|----------------------|--|---|-------------------------|--------------------------|-------------------------|



Procedure NA for arrival on PXV
VORTAC airway radials 355 CW 151.

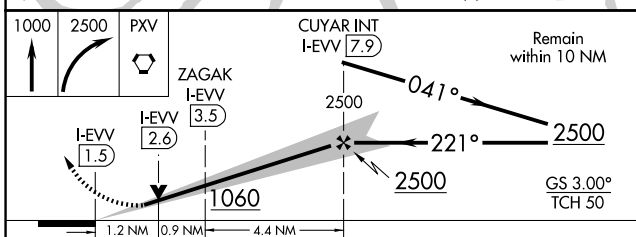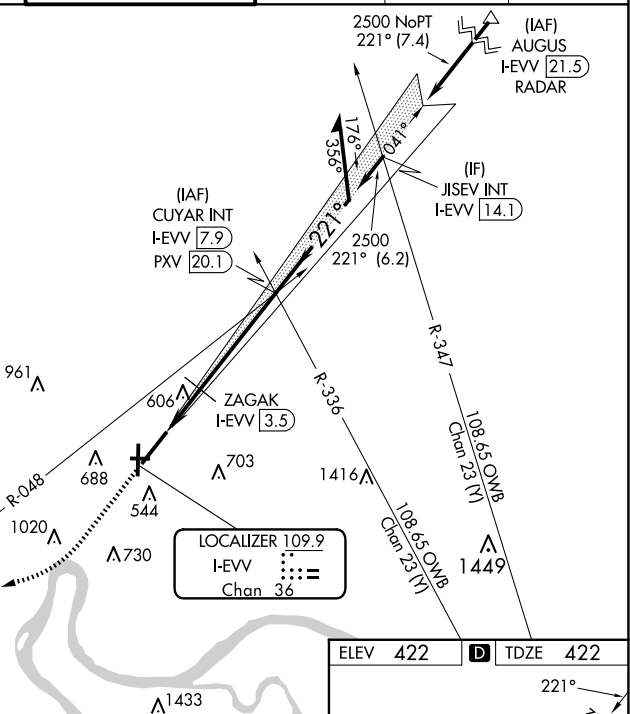

| CATEGORY | A | B | C | D |
|-----------------------------------|----------------------|-----------------------|-------------------------|-----------------------|
| S-ILS 22* | 622/24 | | 200 (200-½) | |
| S-LOC 22 | 1060/24 | 638 (700-½) | 1060-1¾ | 638 (700-1¾) |
| C CIRCLING | 1060-1 | 638 (700-1) | 1060-1¾ 638 (700-1¾) | 1060-2 638 (700-2) |
| ZAGAK FIX MINIMUMS (DME REQUIRED) | | | | |
| S-LOC 22 | 840/24 | 418 (500-½) | 840/40 | 418 (500-¾) |
| C CIRCLING | 920-1 498 (500-1) | 1040-1 618 (700-1) | 1040-1¾ 618 (700-1¾) | 1040-2 618 (700-2) |

