

|                            |                        |                        |
|----------------------------|------------------------|------------------------|
| LOC I-PYU<br><b>110.35</b> | APP CRS<br><b>003°</b> | Rwy Idg<br><b>5999</b> |
|                            |                        | TDZE<br><b>650</b>     |
|                            |                        | Apt Elev<br><b>654</b> |

# LOC RWY 36

ILLINOIS VALLEY RGNL-WALTER A. DUNCAN FIELD (VYS)


**NA** When local altimeter setting not received, use Marshall County altimeter setting and increase all MDA 80 feet; increase S-36 Cats C and D visibility 1 1/2 miles, increase Circling Cat C visibility to 2 miles and Circling Cat D visibility to 3 miles. WITAT fix minimums: increase S-36 Cats C and D visibility to 1 1/2 miles, increase Circling Cat C visibility to 2 miles and Cat D visibility to 3 miles. Inop table does not apply to Cats A and B. For inop ODALS, increase Cats C and D visibility to 1 1/2 miles. WITAT fix minimums: Inop table does not apply. For inop ODALS when using Marshall County altimeter setting, inop table does not apply to Cats A and B. For inop ODALS, increase Cats C and D visibility to 1 1/2 miles. WITAT fix minimums: inop table does not apply to Cats A and B, increase Cats C and D visibility to 1 1/2 miles.

**ODALS**  
MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 063° and on BDF VORTAC R-058 to KELSI INT/BDF 31.8 DME and hold.


AWOS-3  
**120.025**

CHICAGO CENTER  
**123.75 259.1**

UNICOM  
**123.0 (CTAF)**

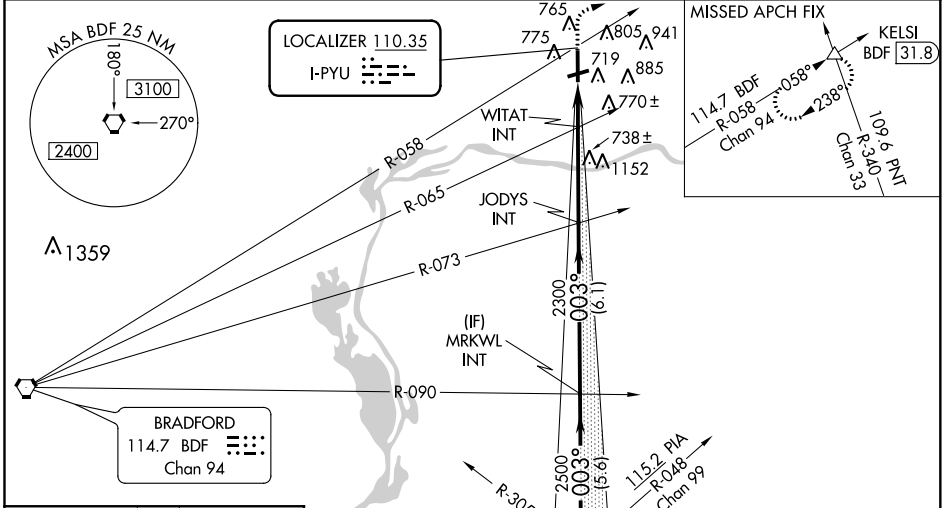

|          |          |
|----------|----------|
| ELEV 654 | TDZE 650 |
| 81       | 678±     |

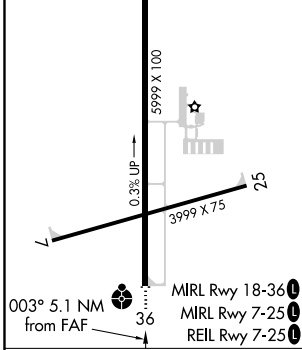

| CATEGORY           | A                     | B                     | C                             | D                             |
|--------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| S-36               | 1140-1                | 490 (500-1)           | 1140-1 1/4                    | 490 (500-1 1/4)               |
| <b>CIRCLING</b>    | 1140-1<br>486 (500-1) | 1240-1<br>586 (600-1) | 1260-1 3/4<br>606 (700-1 3/4) | 1460-2 1/2<br>806 (900-2 1/2) |
| WITAT FIX MINIMUMS |                       |                       |                               |                               |
| S-36               | 1000-1 350 (400-1)    |                       |                               |                               |
| <b>CIRCLING</b>    | 1120-1<br>466 (500-1) | 1240-1<br>586 (600-1) | 1260-1 3/4<br>606 (700-1 3/4) | 1460-2 1/2<br>806 (900-2 1/2) |

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| FAF to MAP 5.1 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 5:06 | 3:24 | 2:33 | 2:02 | 1:42 |

EC-3, 24 MAY 2018 to 21 JUN 2018

EC-3, 24 MAY 2018 to 21 JUN 2018