

WAAS CH <b>82037</b> <b>W36A</b>	APP CRS <b>003°</b>	Rwy Idg TDZE <b>650</b> Apt Elev <b>654</b>	<b>5999</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 36


ILLINOIS VALLEY RGNL-WALTER A DUNCAN FIELD (VYS)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Marshall County altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LNAV Cats C/D visibility to 1 1/8 miles, Circling Cat C visibility to 2 miles and Circling Cat D visibility to 3 miles. Inoperative table does not apply to LPV, LNAV/VNAV and LNAV. For inoperative ODALS when using Marshall County altimeter setting, inoperative table does not apply to LNAV Cats A/B; increase LNAV Cat D visibility to 1 3/8. VDP and Baro-VNAV NA with Marshall County altimeter setting.

**ODALS**

**MISSED APPROACH:**  
Climb to 2500 direct JITSA and hold.


<b>AWOS-3</b> <b>120.025</b>	<b>CHICAGO CENTER</b> <b>123.75 259.1</b>	<b>UNICOM</b> <b>123.0 (CTAF) 1</b>
---------------------------------	--	--

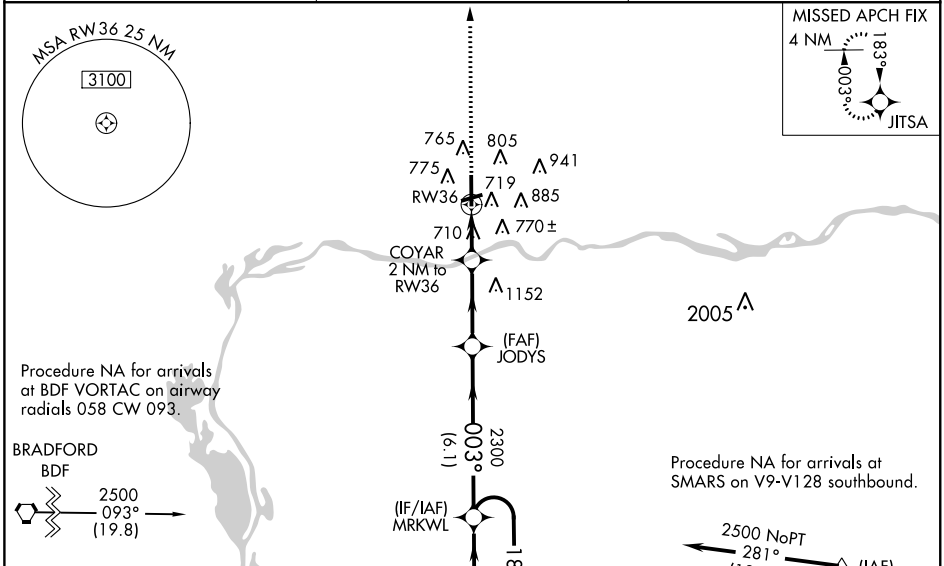

**ELEV 654** | **TDZE 650**

MIRL Rwy 18-36 and 7-25 **1**  
REIL Rwy 7-25 **1**

**678±**

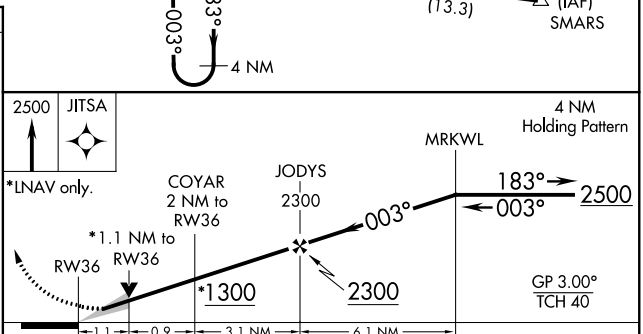

CATEGORY	A	B	C	D
LPV DA		900-1	250 (300-1)	
LNAV/VNAV DA		900-1	250 (300-1)	
LNAV MDA		1020-1	370 (400-1)	
CIRCLING	1120-1 466 (500-1)	1240-1 586 (600-1)	1260-1 3/4 606 (700-1 3/4)	1460-2 1/2 806 (900-2 1/2)

EC-3, 22 JUN 2017 to 20 JUL 2017

EC-3, 22 JUN 2017 to 20 JUL 2017