

| | | |
|---------------------------------|------------------------|---------------------------------------------------|
| WAAS CH 45816 W18A | APP CRS 184° | Rwy Idg TDZE 752 Apt Elev 754 |
|---------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 18




WASHINGTON MUNI (A WG)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).
 ▲ Baro-VNAV NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1064 feet, LNAV/VNAV DA to 1116 feet; increase all MDA 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
BEHTY and hold.

| | | |
|--------------------------|---------------------------------------|---------------------------------|
| AWOS-3 127.825 | CHICAGO CENTER 135.6 370.95 | UNICOM 122.7 (CTAF) 0 |
|--------------------------|---------------------------------------|---------------------------------|

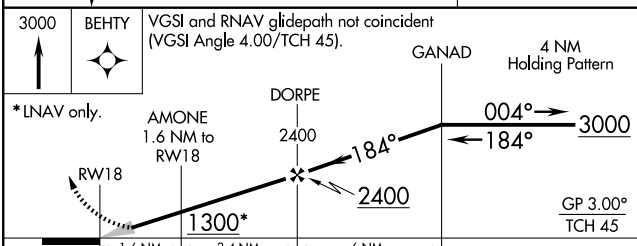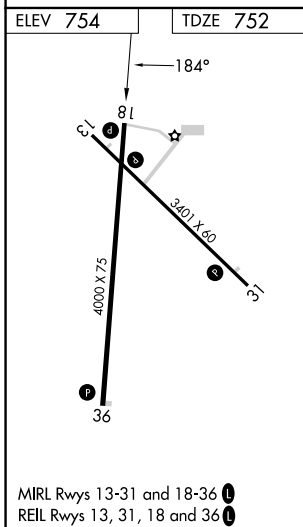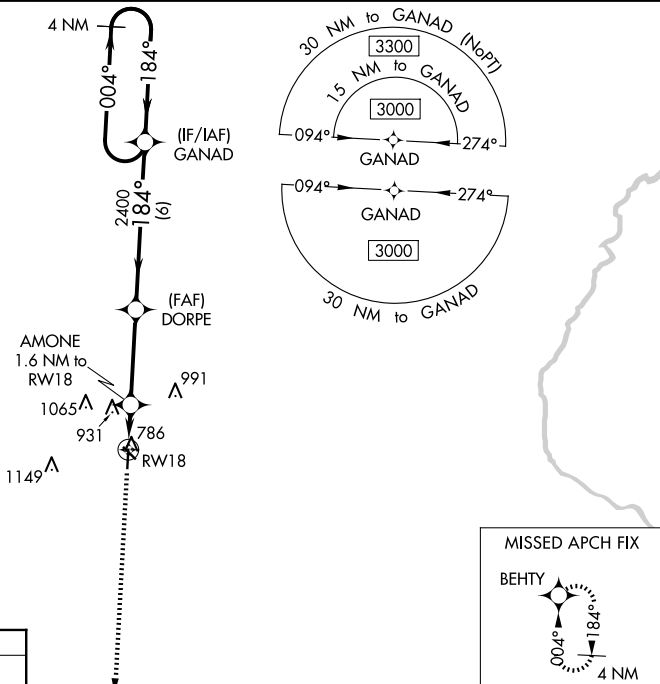

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------|----|
| LPV DA | 1002-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1054-1 302 (300-1) | | | NA |
| LNAV MDA | 1160-1 | 408 (500-1) | 1160-1½ 408 (500-1½) | NA |
| C CIRCLING | 1200-1 446 (500-1) | 1260-1 506 (600-1) | 1500-2¼ 746 (800-2¼) | NA |

NC-3, 15 MAY 2025 to 12 JUN 2025

NC-3, 15 MAY 2025 to 12 JUN 2025