WAAS	APP CRS	Rwy Idg	9501
CH 82708	274°	TDZE	1027
W27A		Apt Elev	1027

RNAV (GPS) Y RWY 27

KANSAS CITY INTL (MCI)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to 1⅜ SM.

*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 4000 direct RUGBB and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

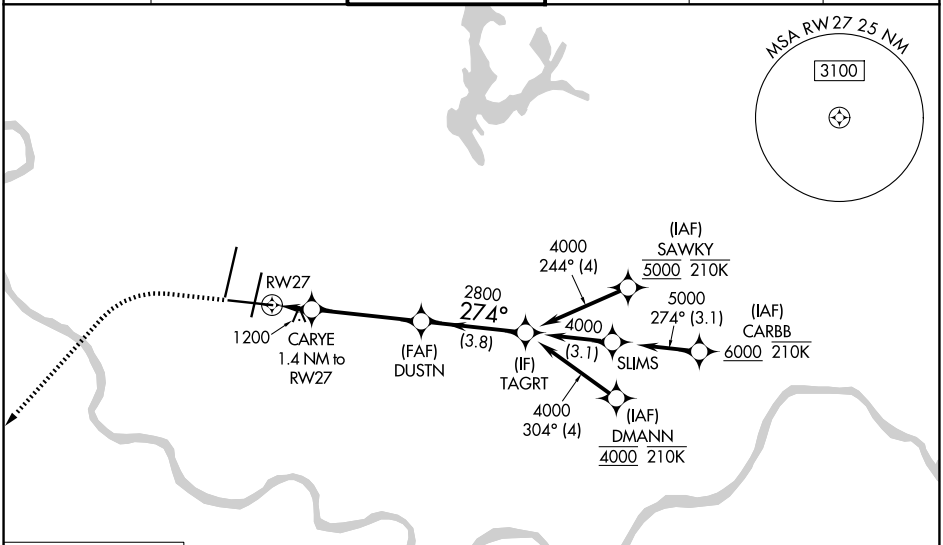

MISSED APCH FIX



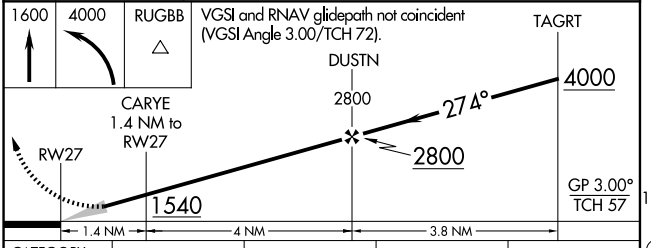

CATEGORY	A	B	C	D
LPV DA*	1227/24 200 (200-½)			
LNAV/VNAV DA	1496/50 469 (500-1)			
LNAV MDA	1460/24 433 (500-½)		1460/40 433 (500-¾)	
C CIRCLING	1540-1 513 (600-1)		1540-1½ 513 (600-1½)	1580-2 553 (600-2)

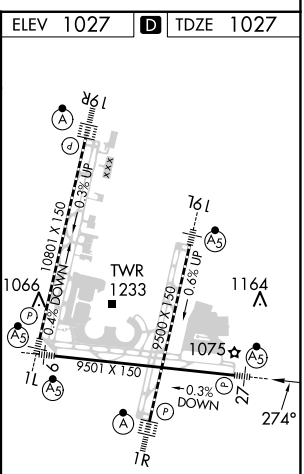

HIRL all Rwys
TDZ/CL Rwys 1L, 1R, 19R and 19L

NC-3, 15 MAY 2025 to 12 JUN 2025
NC-3, 15 MAY 2025 to 12 JUN 2025