


| | | | |
|----------------------------|------------------------|-----------------------------|---|
| LOC I-SUS 110.55 | APP CRS 079° | Rwy Idg TDZE Apt Elev | 7414 462 463 |
|----------------------------|------------------------|-----------------------------|---|

ILS or LOC RWY 8R



SPIRIT OF ST LOUIS (SUS)

⚠ When local alimeter setting not received, use St Louis Lambert Intl alimeter setting and increase all DA to 719 feet, all MDA 60 feet, increase S-LOC 8R Cats C/D to RVR 5000 and Circling Cat C visibility ¼ mile. For inop MALSR, increase S-LOC 8R Cats C/D visibility to RVR 6000. For inop MALSR when using St Louis Lambert Intl alimeter setting, increase S-LOC 8R Cats C/D visibility to 1 ½ mile.
*RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl alimeter setting).

MALSR
MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct FTZ VORTAC and hold.



| | | | | | | |
|----------------------|---|---|-------------------------|--------------------------|---|-------------------------|
| ATIS 134.8 | ST. LOUIS APP CON 126.5 254.3 | SPIRIT TOWER* 124.75 (CTAF) 0 257.2 | GND CON 121.7 | CLNC DEL 133.1 | ST. LOUIS CLNC DEL 121.7 (when tower closed) | UNICOM 122.95 |
|----------------------|---|---|-------------------------|--------------------------|---|-------------------------|

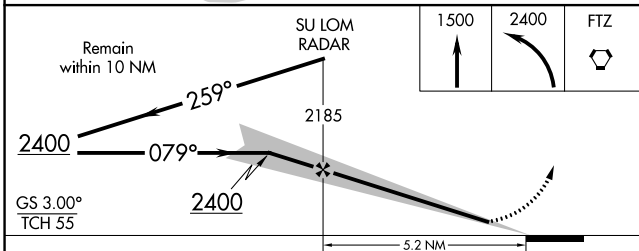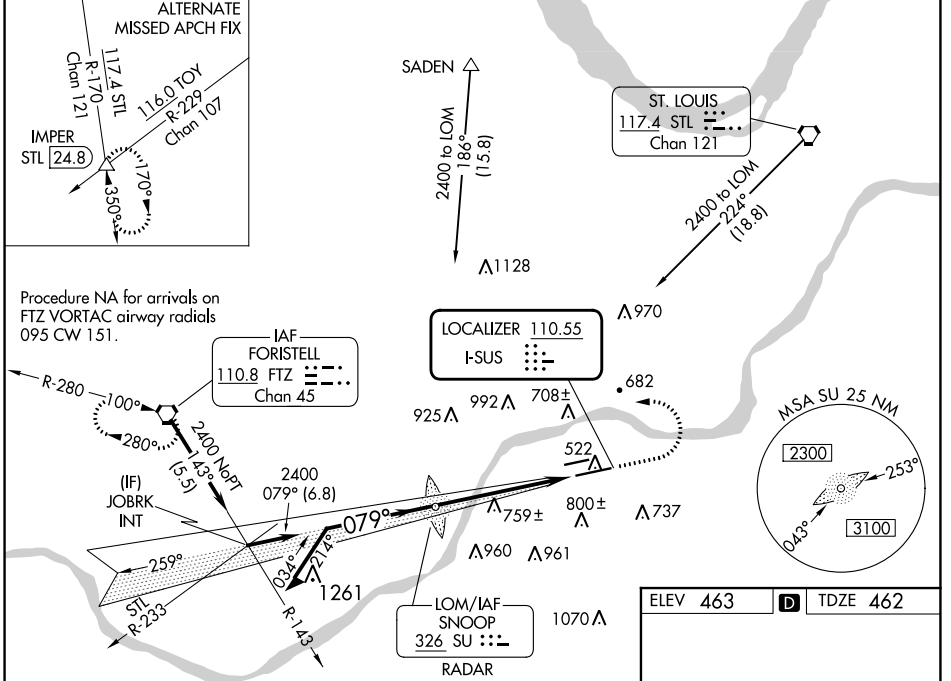

| | | |
|----------|----------|----------|
| ELEV 463 | D | TDZE 462 |
|----------|----------|----------|

TWR 581

5000 X 75

7485 X 150

26R

079°

FAF to MAP 5.2 NM

| | |
|-------------------|--------------------------|
| MIRL Rwy 8L-26R | |
| HIRL Rwy 8R-26L | |
| FAF to MAP 5.2 NM | |
| Knots | 60 90 120 150 180 |
| Min:Sec | 5:12 3:28 2:36 2:05 1:44 |

| CATEGORY | A | B | C | D |
|-----------|-----------------------|-----------------------|-----------------------|-----------------------|
| S-ILS 8R* | 662/24 200 (200-½) | | | |
| S-LOC 8R | 880/24 | 418 (500-½) | 880/40 | 418 (500-¾) |
| CIRCLING | 1100-1 637 (700-1) | 1140-1 677 (700-1) | 1160-2 697 (700-2) | 1360-3 897 (900-3) |