


WAAS CH 65626 W29A	APP CRS 290°	Rwy Idg 7200 TDZE 56 Apt Elev 76
--	------------------------	---


RNAV (GPS) RWY 29
PORTLAND INTL JETPORT (PWM)

RNP APCH	MAISLR A5	MISSED APPROACH: Climb to 3000 direct BUXTO and hold, continue climb-in-hold to 3000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop MAISLR, increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cat C/D visibility to 1¾ mile. **RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 119.05	PORTLAND APP CON ★ 119.75 269.35	PORTLAND TOWER ★ 120.9 0 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	-------------------------

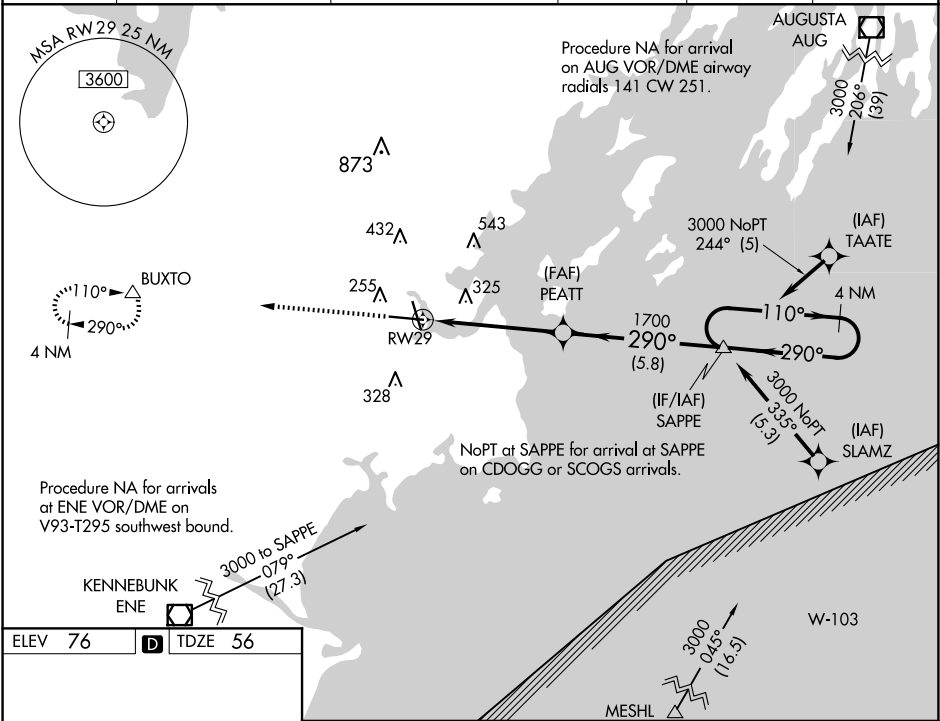

ELEV 76	D	TDZE 56
---------	---	---------

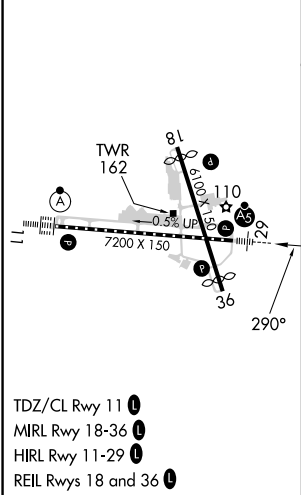

3000 ↑	BUXTO △	4 NM Holding Pattern			
* LNAV only		* 1.5 NM to RW29	PEATT 1700	SAPPE	110° → 3000 ← 290°
		1700	1700	GP 3.00° TCH 50	
1.5 NM		3.5 NM	5.8 NM		
CATEGORY	A	B	C	D	
LPV DA	** 256/24 200 (200-½)				
LNAV/VNAV DA	567-1⅓ 511 (500-1⅓)				
LNAV MDA	580/24	524 (600-½)	580/55	524 (600-1)	
CIRCLING	620-1 544 (600-1)	640-1 564 (600-1)	740-1¾ 664 (700-1¾)	860-2½ 784 (800-2½)	

NE-1, 15 MAY 2025 to 12 JUN 2025

NE-1, 15 MAY 2025 to 12 JUN 2025