

WAAS CH <b>97720</b> <b>W05A</b>	APP CRS <b>049°</b>	Rwy Idg <b>5998</b> TDZE <b>184</b> Apt Elev <b>187</b>
--	------------------------	---



# RNAV (GPS) RWY 5

MORRISTOWN MUNI (MMU)

**⚠** Circling to Rwy 13-31 NA at night. VDP and Baro-VNAV NA when using Newark altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Newark altimeter setting and increase all DA 54 feet and all MDA 60 feet. Increase LPV all Cats and LNAV C/D visibility 1/8 mile. Increase LNAV/VNAV all Cats and Circling Cat C visibility 1/4 mile.

**⚠** MISSED APPROACH: Climb to 2000 direct MIKEF and hold.

ATIS <b>124.25</b>	NEW YORK APP CON <b>127.6 379.9</b>	MORRISTOWN TOWER* <b>118.1</b> (CTAF) <b>353.9</b>	GND CON <b>134.2</b>	CLNC DEL <b>128.6</b>
-----------------------	--	---	-------------------------	--------------------------

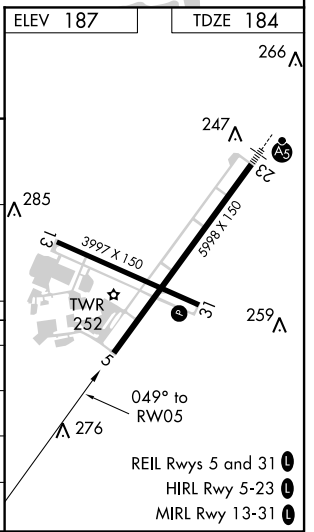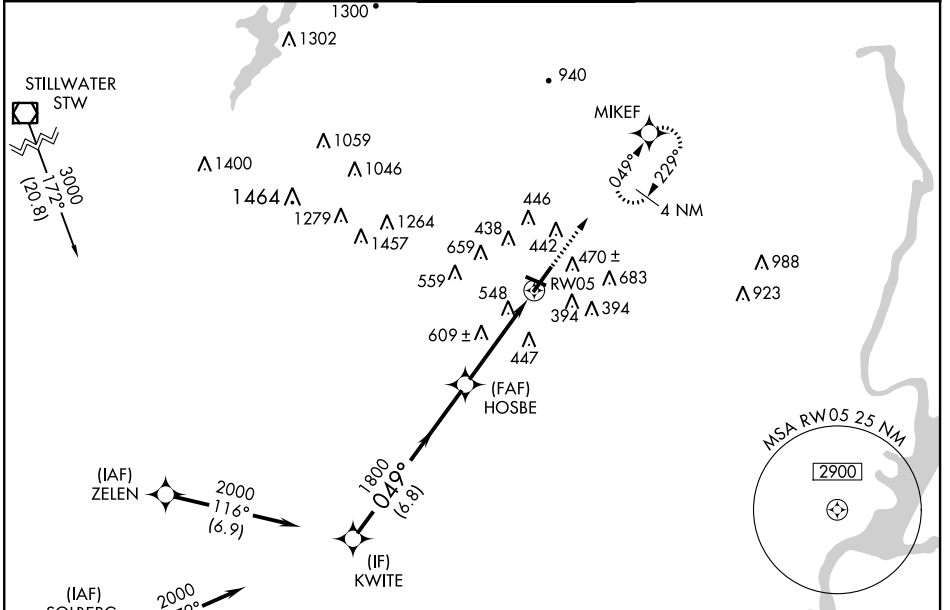

CATEGORY	A	B	C	D
LPV DA	818-17/8	634 (700-17/8)		NA
LNAV/VNAV DA	896-21/4	712 (800-21/4)		NA
LNAV MDA	860-1	676 (700-1)	860-17/8	676 (700-17/8)
CIRCLING	900-1	713 (800-1)	900-2 713 (800-2)	1000-23/4 813 (900-23/4)

NE-2, 01 MAR 2018 to 29 MAR 2018

NE-2, 01 MAR 2018 to 29 MAR 2018