

WAAS CH 45621 W23A	APP CRS 229°	Rwy Idg TDZE Apt Elev	5998 183 187
--	------------------------	-----------------------------	---


RNAV (GPS) Z RWY 23

MORRISTOWN MUNI (MMU)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). For inop MALS, increase LNAV/VNAV all Cats visibility to 1½ and LNAV Cats C and D visibility to 1½ mile. DME/DME RNP-0.3 NA. When local altimeter not received, use Newark Liberty Intl altimeter setting and increase all DA 54 feet and all MDA 60 feet, increase LNAV/VNAV all Cats and LNAV Cats C and D visibility ½ mile. VDP and Baro-VNAV NA when using Newark Liberty Intl altimeter setting. Night landing: Rwy 13, 31 NA. For inop MALS when using Newark Liberty Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 2½.

MALS
MISSED APPROACH:
Climb to 2000 direct
CODOL and hold.

ATIS 124.25	NEW YORK APP CON 127.6 379.9	MORRISTOWN TOWER* 118.1 (CTAF) 353.9	GND CON 134.2	CLNC DEL 128.6
-----------------------	--	--	-------------------------	--------------------------

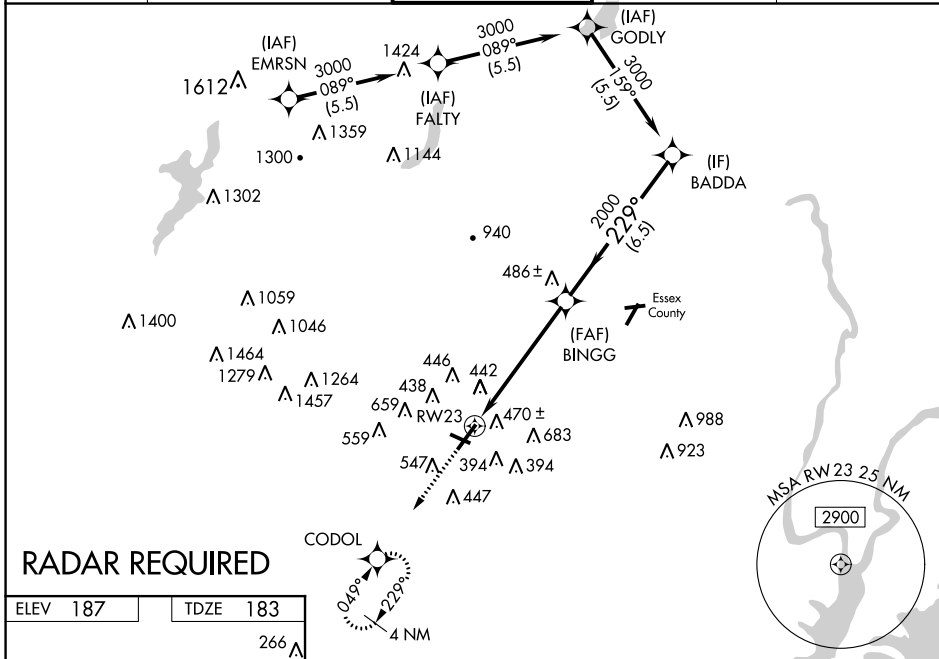

RADAR REQUIRED

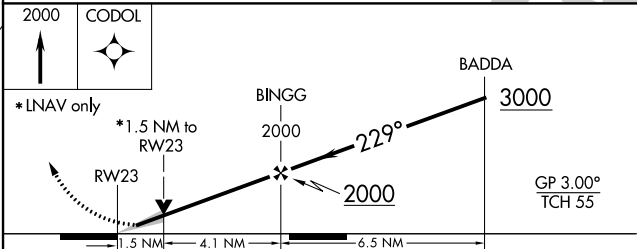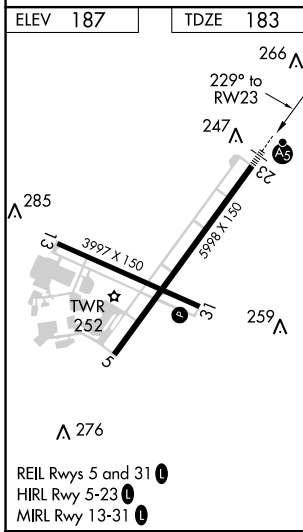

CATEGORY	A	B	C	D
LPV DA		383-½	200 (200-½)	
LNAV/VNAV DA		755-1½	572 (600-1½)	
LNAV MDA	700-½	517 (600-½)	700-1	517 (600-1)
C CIRCLING	860-1 673 (700-1)	900-1 713 (800-1)	1000-2½ 813 (900-2½)	1200-3 1013 (1100-3)

NE-2: 17 AUG 2017 to 14 SEP 2017

NE-2: 17 AUG 2017 to 14 SEP 2017