

LOC I-PFS <b>108.9</b>	APP CRS <b>281°</b>	Rwy Idg 28L 28C	11500 9708
		TDZE	1125 1134
		Apt Elev	1203 1203


# ILS or LOC RWY 28L

PITTSBURGH INTL (PIT)

Simultaneous approach authorized. For inop ALS, increase S-ILS 28L Cat E visibility to RVR 4000 and S-LOC 28L. Cats C, D, E visibility to 1/2 SM. DME from MMJ DME. Simultaneous reception of I-PFS and MMJ DME required.

MALSRR MISSED APPROACH: Climb to 4000 on heading 280° and HLG VOR/DME R-043 to HLG VOR/DME and hold.


D-ATIS ARR <b>127.25</b> DEP <b>135.9</b>	PITTSBURGH APP CON <b>123.95 360.8</b>	PITTSBURGH TOWER <b>128.3 291.7</b>	GND CON SOUTH <b>121.9 348.6</b> NORTH <b>127.8 348.6</b>	CLNC DEL <b>126.75 353.7</b>
---	---	--	---	---------------------------------

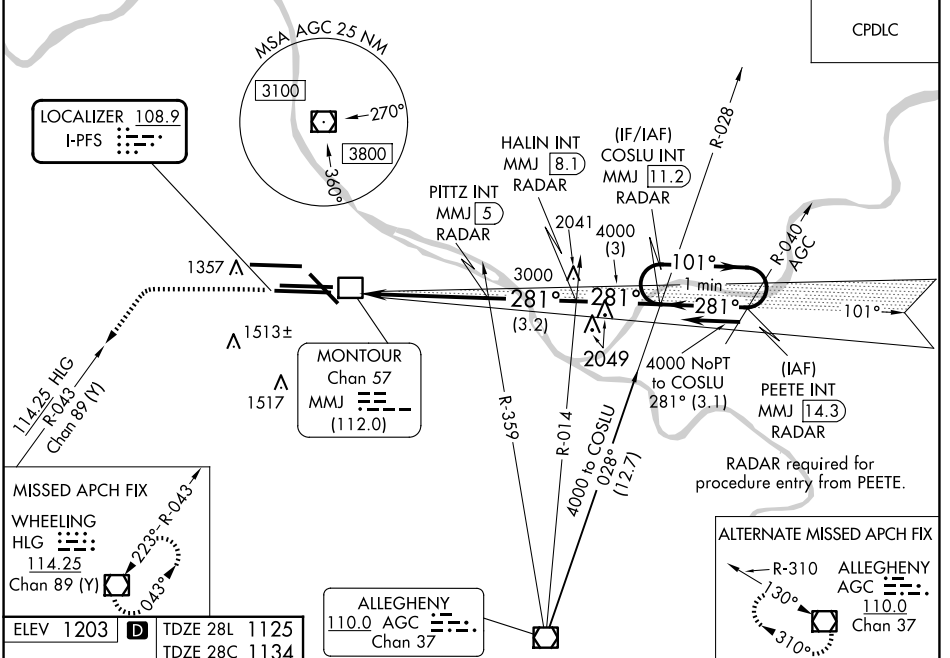

NE-4, 15 MAY 2025 to 12 JUN 2025

NE-4, 15 MAY 2025 to 12 JUN 2025

ELEV 1203	TDZE 28L 1125	TDZE 28C 1134	4000	hdg 280°	HLG R-043	HLG	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).
-----------	---------------	---------------	------	----------	-----------	-----	---

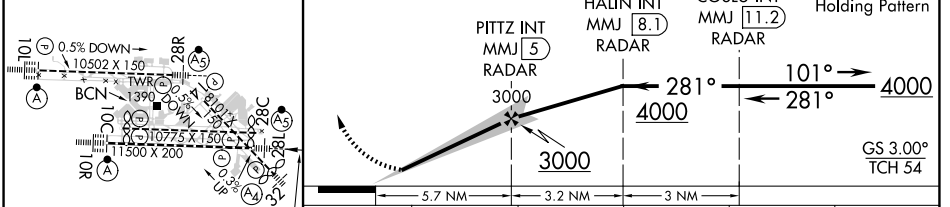

CATEGORY	A	B	C	D	E
S-ILS 28L	1325/18		200 (200-1/2)		
S-LOC 28L	1700/24	575 (600-1/2)		1700-1 1/4 575 (600-1 1/4)	
SIDESTEP 28C	1700-1	566 (600-1)		1700-1 1/2 566 (600-1 1/2)	1700-2 566 (600-2)
CIRCLING	1700-1	497 (500-1)		1880-2 677 (700-2)	1880-2 1/4 677 (700-2 1/4) 1880-2 1/2 677 (700-2 1/2)