

LOC I-SYD <b>111.3</b>	APP CRS <b>032°</b>	Rwy ldg <b>10165</b>
		TDZE <b>5328</b>
		Apt Elev <b>5344</b>


# ILS or LOC RWY 3

CASPER/NATRONA COUNTY INTL (CPR)

**⚠ DME from DDY VOR/DME. Simultaneous reception of I-SYD and DDY DME required. When local altimeter setting not received, use Douglas altimeter setting and increase DA to 5697 feet and all MDA's 180 feet, increase S-ILS visibility all Cats ¼ SM and S-LOC visibility Cat B, C, D and Circling Cats B, C, D visibility ½ SM, increase MAMUE FIX MINIMUM Circling visibility Cat C ½ SM and Cat D ¼ SM. For inoperative MALSRS when using Douglas altimeter setting increase S-ILS visibility all Cats to 1½ mile. MAMUE FIX MINIMUMS: For inoperative MALSRS, increase S-LOC visibility Cats C, and D to 1½ mile. #RVR 1800 authorized with use of FD or AP or HUD to DA.**

**MALSRS** MISSED APPROACH: Climb to 7500 then left turn direct DDY VOR/DME and hold.

ATIS <b>126.15</b>	CASPER APP CON * <b>120.65 354.1</b>	CASPER TOWER * <b>118.3 (CTAF) 257.8</b>	GND CON <b>121.9</b>	CLNC DEL <b>121.9 257.8</b>	UNICOM <b>122.95</b>
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

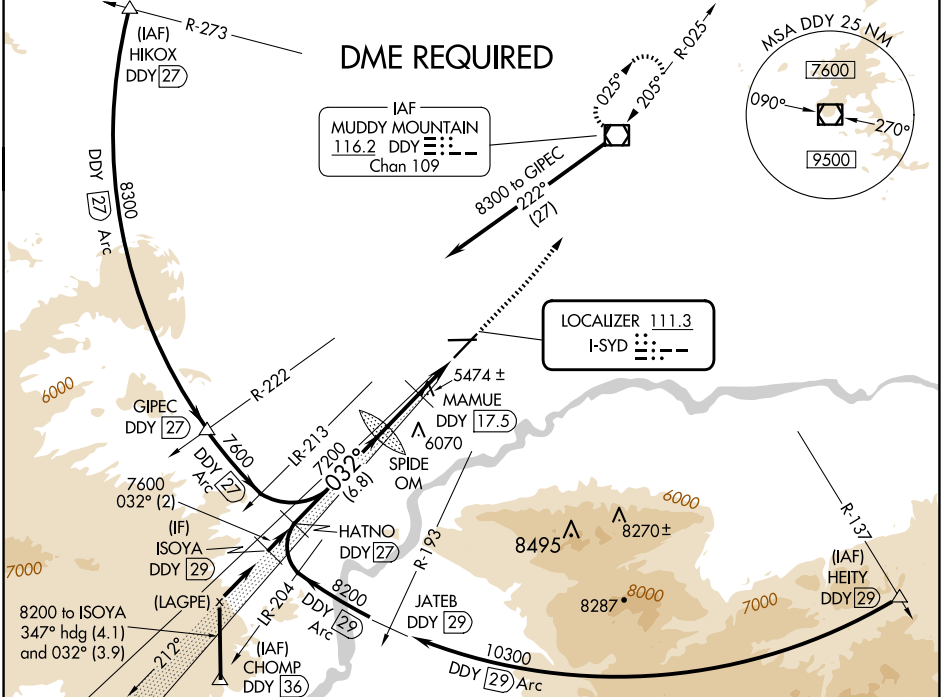

ISOYA DDE 29	*6400 when using Douglas altimeter setting.	HATNO DDE 27	SPIDE OM	MAMUE DDE 17.5	DDY 14.7	ELEV 5344	TDZE 5328
8200	7600	7200	7183	7500	7500		
GS 3.00° TCH 50	2 NM	6.8 NM	2.9 NM	2.7 NM			
CATEGORY	A	B	C	D			
S-ILS 3	# 5528/24 200 (200-½)						
S-LOC 3	6220/40	892 (900-¾)	6220-2	892 (900-2)			
CIRCLING	6220-1¼	876 (900-1¼)	6220-2½ 876 (900-2½)	6220-2¾ 876 (900-2¾)			
MAMUE FIX MINIMUMS							
S-LOC 3	5740/24	412 (400-½)	5740/40	412 (400-¾)			
CIRCLING	5740-1 396 (400-1)	5800-1 456 (500-1)	5860-1½ 516 (600-1½)	6200-2¾ 856 (900-2¾)			
						REIL Rwy 21 1 HIRL Rws 3-21 and 8-26 1	
						FAF to MAP 5.6 NM	
						Knots	60 90 120 150 180
						Min:Sec	5:36 3:44 2:48 2:14 1:52

NW-1, 15 MAY 2025 to 12 JUN 2025

NW-1, 15 MAY 2025 to 12 JUN 2025