




| | | | |
|---------------------------------|------------------------|-----------------------------|---|
| WAAS CH 78212 W21A | APP CRS 211° | Rwy Idg TDZE Apt Elev | 9059 4452 4452 |
|---------------------------------|------------------------|-----------------------------|---|

RNAV (GPS) RWY 21

POCATELLO RGNL (PIH)

| | | |
|---|-------|---|
| RNP APCH - GPS. | MALSR | MISSED APPROACH: Climb to 7000 direct HUMBA and track 273° to SICOY and hold. |
| <p>⚠ Circling NA southeast of Rwy 3-21. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.</p> <p>*RVR 1800 authorized with use of FD or AP or HUD to DA.</p> | | |

| | | | | |
|------------------------|--|--|-------------------------|-------------------------|
| ATIS 135.625 | SALT LAKE CENTER 128.35 239.25 | POCATELLO TOWER* 119.1 (CTAF) 257.8 | GND CON 121.9 | UNICOM 122.95 |
|------------------------|--|--|-------------------------|-------------------------|

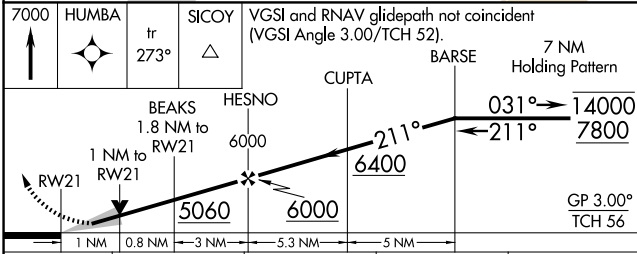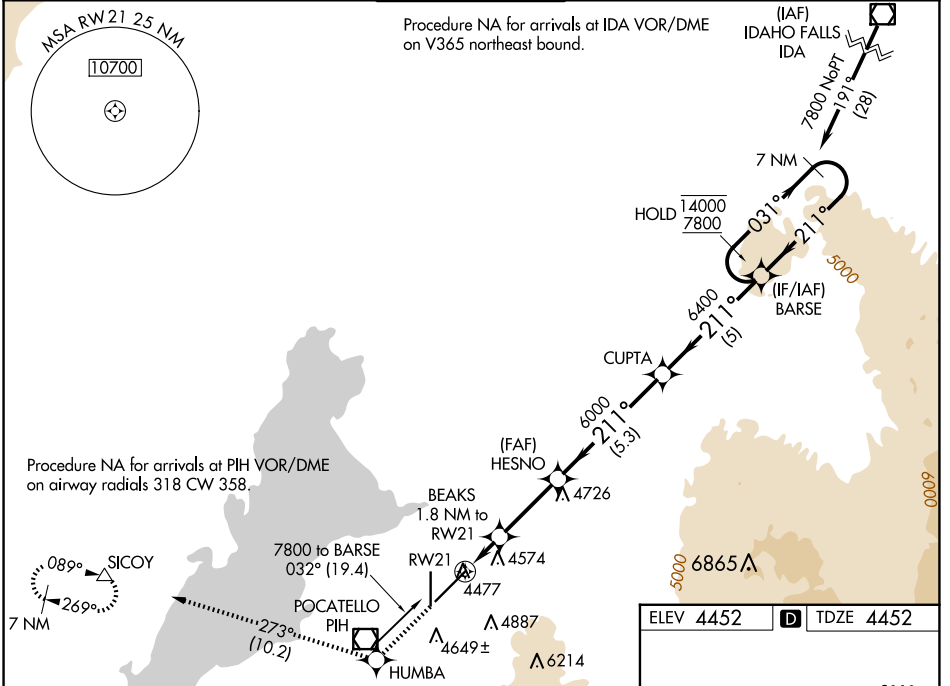

| | | | | |
|--------------|-----------------------|-----------------------|-------------------------|-----------------------|
| CATEGORY | A | B | C | D |
| LPV DA* | | 4652/24 | 200 (200-½) | |
| LNAV/VNAV DA | | 4835/35 | 383 (400-¾) | |
| LNAV MDA | 4820/24 | 368 (400-½) | 4820/35 | 368 (400-¾) |
| CIRCLING | 4860-1 408 (500-1) | 4920-1 468 (500-1) | 4920-1½ 468 (500-1½) | 5020-2 568 (600-2) |

HIRL Rwy 3-21

MIRL Rwy 17-35

REIL Rws 3 and 17

NW-1, 15 MAY 2025 to 12 JUN 2025

NW-1, 15 MAY 2025 to 12 JUN 2025