

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>90432</b><br><b>W31A</b> | APP CRS<br><b>306°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5601</b><br><b>583</b><br><b>595</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 31

SAN MARCOS RGNL (HYI)



**⚠** Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cat C/D/E and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

**MISSED APPROACH:**  
Climb to 3500 direct  
ORALE and hold.

|                          |                                       |  |                           |                            |   |
|--------------------------|---------------------------------------|--|---------------------------|----------------------------|---|
| ATIS ★<br><b>120.825</b> | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER ★<br><b>126.825</b> (CTAF) <b>L</b> | GND CON<br><b>120.125</b> | CLNC DEL<br><b>120.125</b> | CLNC DEL<br><b>121.35</b><br>(When ATCT Closed) |
|--------------------------|---------------------------------------|--|---------------------------|----------------------------|---|

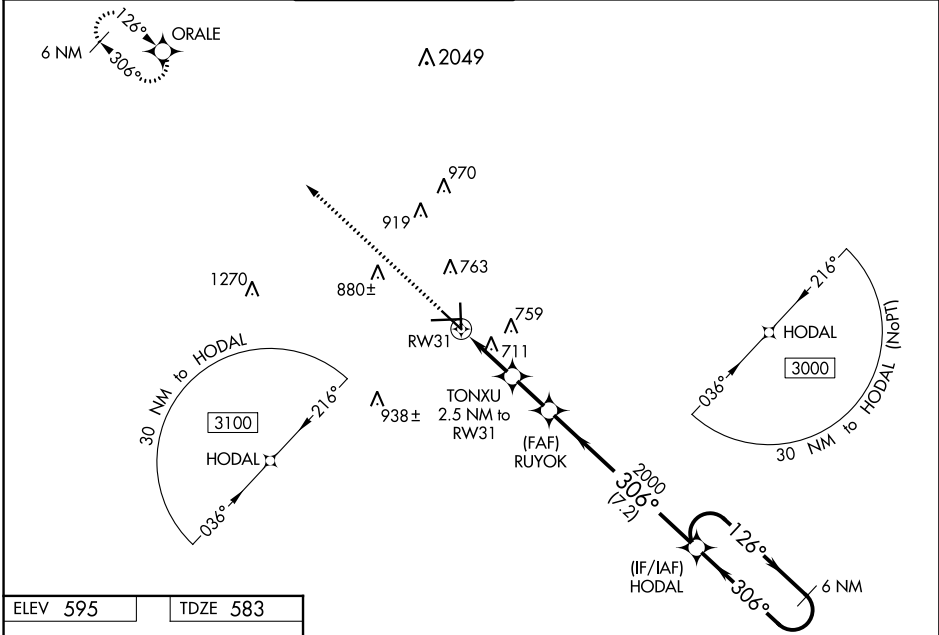

|                 |                 |
|-----------------|-----------------|
| ELEV <b>595</b> | TDZE <b>583</b> |
|-----------------|-----------------|

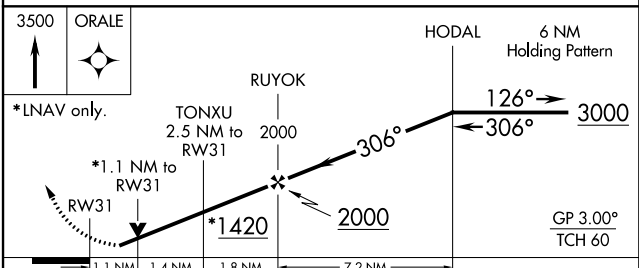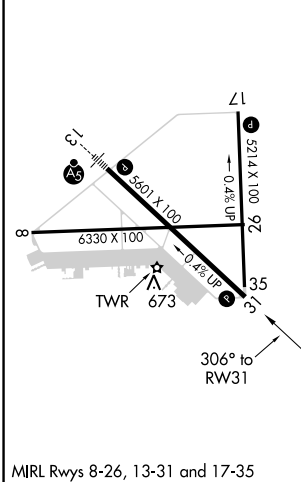

| CATEGORY     | A                 | B           | C                         | D               | E               |
|--------------|-------------------|-------------|---------------------------|-----------------|-----------------|
| LPV DA       | 860-7/8           |             | 277 (300-7/8)             |                 |                 |
| LNAV/VNAV DA | 906-1             |             | 323 (400-1)               |                 |                 |
| LNAV MDA     | 980-1 397 (400-1) |             | 980-1 1/8 397 (400-1 1/8) |                 |                 |
| CIRCLING     | 1080-1            | 1120-1      | 1240-1 3/4                | 1320-2 1/4      | 1340-2 3/4      |
|              | 485 (500-1)       | 525 (600-1) | 645 (700-1 3/4)           | 725 (800-2 1/4) | 745 (800-2 3/4) |

SC-3, 29 MAR 2018 to 26 APR 2018

SC-3, 29 MAR 2018 to 26 APR 2018