RNAV (GPS) RWY 23

COLUMBIA-MARION COUNTY (ØRØ)

WAAS CH 56236 W23A	APP CRS 234°	Rwy ldg 4460 TDZE 265 Apt Elev 265

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hattiesburg-Laurel altimeter setting and increase all DA 66 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats and Circling Cat C visibilities ¼ mile, increase Circling Cat D visibility ½ mile, increase LNAV Cat C and D visibility ⅛ mile. VDP and Baro-VNAV NA when using Hattiesburg-Laurel altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA.

NA

MISSED APPROACH: Climb to 2400 direct HULNA and hold.

AWOS-3PT	HOUSTON CENTER	UNICOM
120.675	126.8 327.8	122.8 (CTAF) L

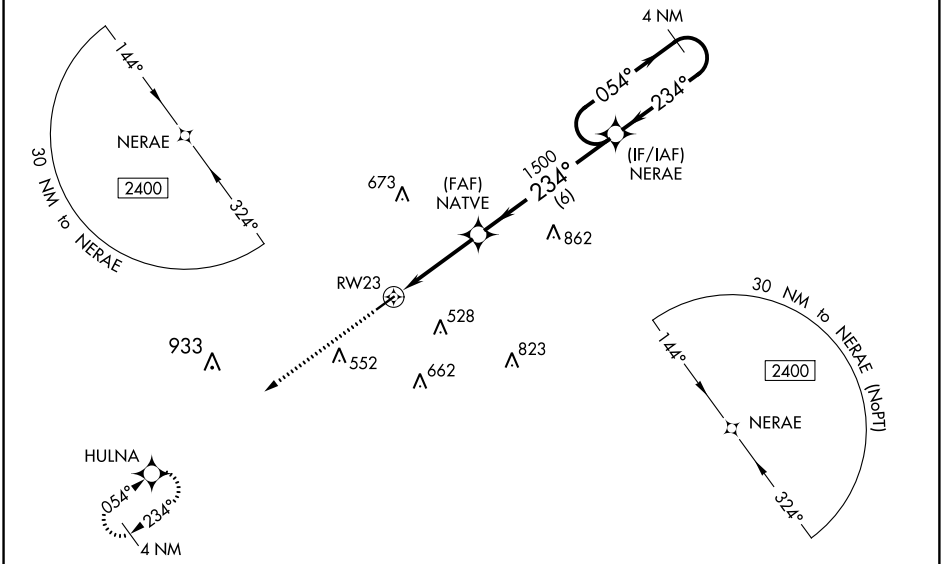

ELEV 265 TDZE 265



REIL Rwy 23
MIRL Rwy 5-23 L

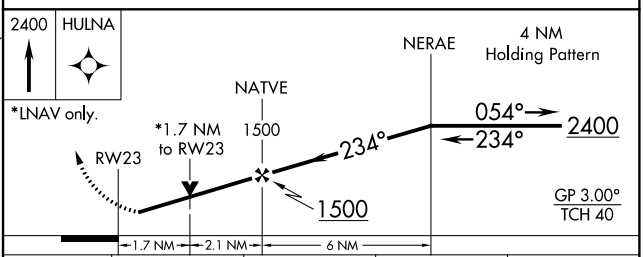

CATEGORY	A	B	C	D
LPV DA	534-⅞ 269 (300-⅞)			
LNAV/VNAV DA	766-1¾ 501 (600-1¾)			
LNAV MDA	860-1 595 (600-1)		860-1¾ 595 (600-1¾)	
C CIRCLING	860-1 595 (600-1)		920-1¾ 655 (700-1¾)	1000-2¼ 735 (800-2¼)

SC-4, 21 JUN 2018 to 19 JUL 2018
SC-4, 21 JUN 2018 to 19 JUL 2018