ILS or LOC RWY 35

ACADIANA RGNL (ARA)

LOC/DME I-ARA	APP CRS	Rwy Idg	8002
108.9	348°	TDZE	21
Chan 26		Apt Elev	24

Circling NA to Rwys 17W and 35W. ADF or DME required.
For inop ALS, increase S-ILS 35 Cat E visibility to ¾ SM,
S-LOC 35 Cat E visibility to 1⅜ SM, and UXYAP FIX minimums
S-LOC 35 Cats C/D/E visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on heading 080° and LFT R-114 to CLYNT INT/LFT 18.8 DME and hold.

ASOS	LAFAYETTE APP CON ★	ACADIANA TOWER ★	GND CON	CLNC DEL	UNICOM	★
133.325	121.1 268.7	125.0 (CTAF) L 239.3	121.7	121.7 118.05 (when twr closed)	122.95	122.7

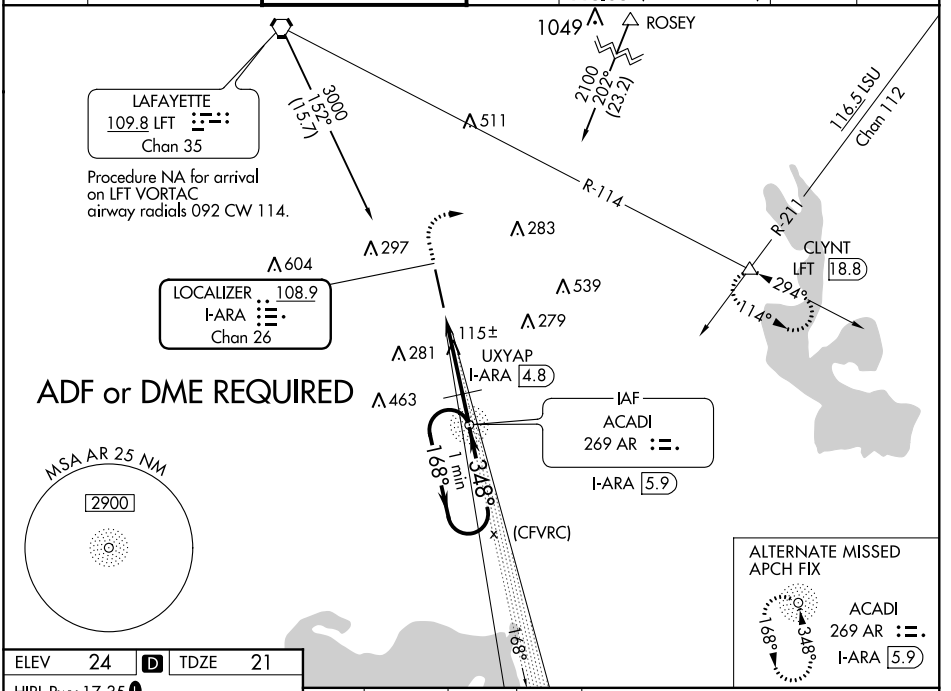

ELEV	24	D	TDZE	21

HIRL Rwy 17-35 L
MIRL Rwy 17W-35W L ★

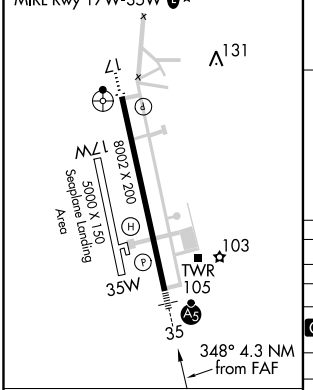

FAF to MAP 4.3 NM					
Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

800	2000	LFT	CLYNT
↑	hdg 080°	R-114	△

*LOC only.

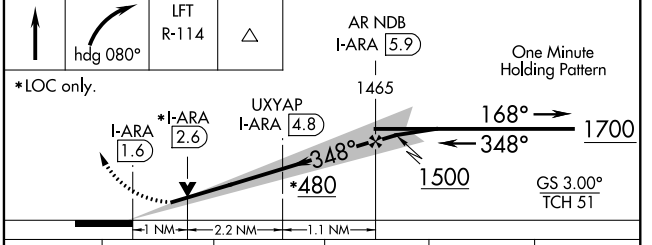

CATEGORY	A	B	C	D	E
S-ILS 35	221-½ 200 (200-½)				
S-LOC 35	480-½ 459 (500-½)		480-⅞ 459 (500-⅞)		
C CIRCLING	480-1 456 (500-1)		600-1½ 576 (600-1½)	680-2 656 (700-2)	900-3 876 (900-3)
UXYAP FIX MINIMUMS (DME REQUIRED)					
S-LOC 35	380-½ 359 (400-½)		380-⅝ 359 (400-⅝)		
C CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)	900-3 876 (900-3)

SC-4, 07 DEC 2017 to 04 JAN 2018
SC-4, 07 DEC 2017 to 04 JAN 2018