

LOC/DME I-ARA 108.9 Chan 26	APP CRS 348°	Rwy Idg TDZE 21 Apt Elev 24	8002
---	------------------------	---	-------------

ILS or LOC RWY 35


ACADIANA RGNL (A.R.A)

▼ Circling NA to Rwys 17W and 35W. ADF or DME required.
 For inop ALS, increase S-ILS 35 Cat E visibility to 3/4 SM,
▲ S-LOC 35 Cat E visibility to 1 1/4 SM, and UXYAP FIX minimums
 S-LOC 35 Cats C/D/E visibility to 1 SM.





MISSED APPROACH: Climb to 800 then climbing
 right turn to 2000 on heading 080° and LFT R-114
 to CLYNT INT/LFT 18.8 DME and hold.

ASOS 133.325	LAFAYETTE APP CON * 121.1 268.7	ACADIANA TOWER * 125.0 (CTAF) 239.3	GND CON 121.7	CLNC DEL 121.7 118.05 (when twr closed)	UNICOM 122.95	0 * 122.7
------------------------	---	---	-------------------------	---	-------------------------	----------------------------

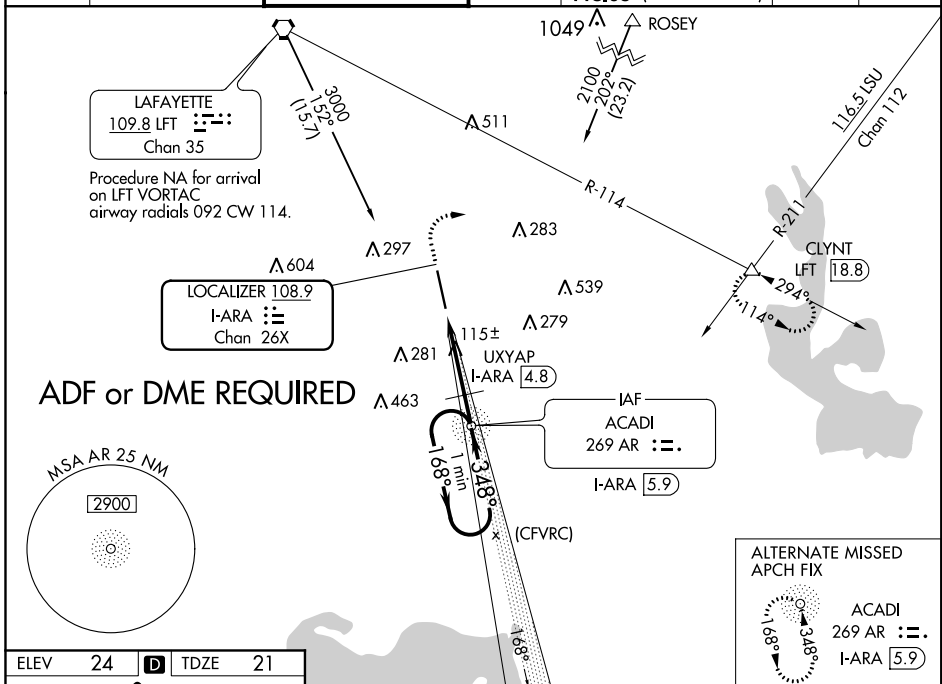

ELEV 24	D	TDZE 21
----------------	----------	----------------

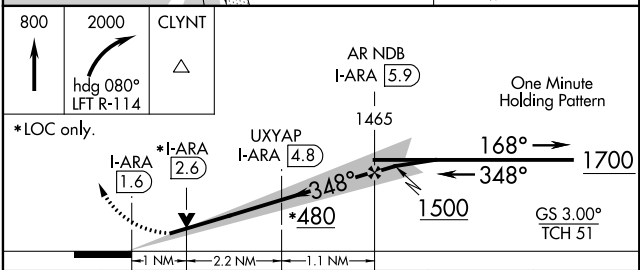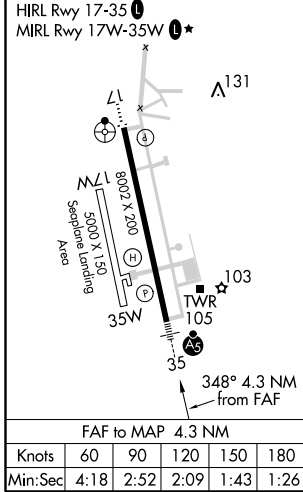

CATEGORY	A	B	C	D	E
S-ILS 35	221-1/2 200 (200-1/2)				
S-LOC 35	480-1/2 459 (500-1/2)		480-7/8 459 (500-7/8)		
C CIRCLING	480-1 456 (500-1)		600-1 1/2 576 (600-1 1/2)		680-2 876 (900-3)
UXYAP FIX MINIMUMS (DME REQUIRED)					
S-LOC 35	380-1/2 359 (400-1/2)		380-5/8 359 (400-5/8)		
C CIRCLING	440-1 416 (500-1)		480-1 576 (600-1 1/2)		680-2 876 (900-3)

SC-4, 12 OCT 2017 to 09 NOV 2017

SC-4, 12 OCT 2017 to 09 NOV 2017