

LOC I-DRI 111.1	APP CRS 355°	Rwy ldg TDZE Apt Elev	5494 197 202
---------------------------	------------------------	-----------------------------	---



LOC RWY 36

BEAUREGARD RGNL (DRI)

NA Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat C ½ SM and Circling Cats C/D visibility ¼ SM.



ODALS
MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT 118.225	POLK APP CON 123.7 261.3	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	---------------------------------

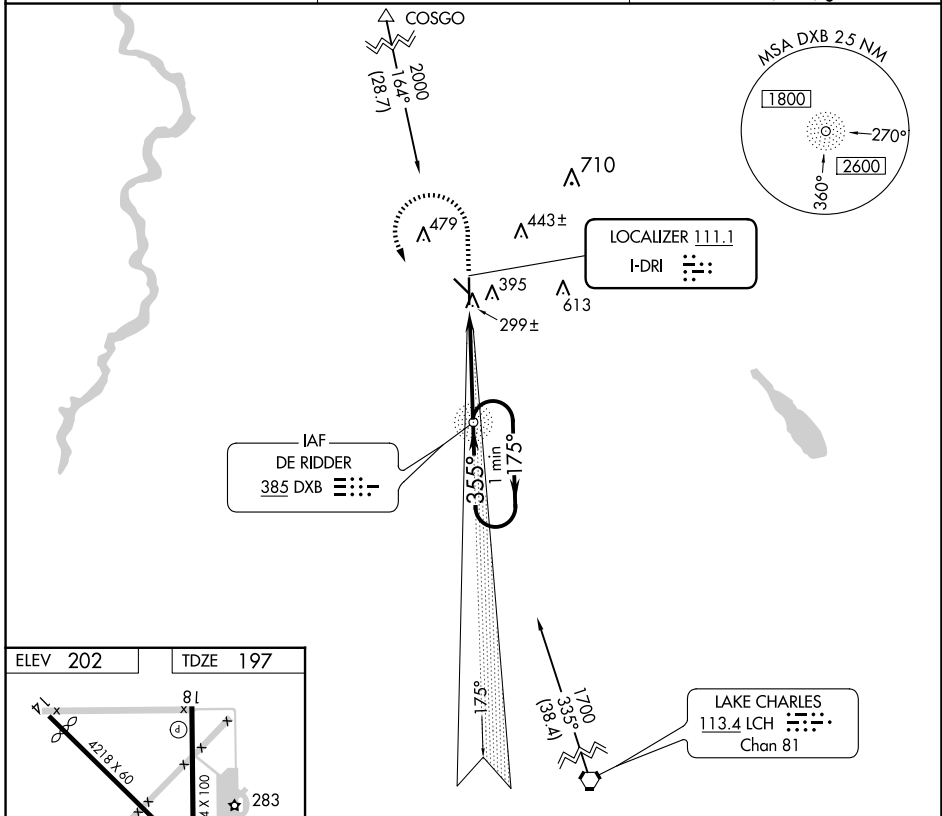

IAF
DE RIDDER
385 DXB

LAKE CHARLES
113.4 LCH
Chan 81

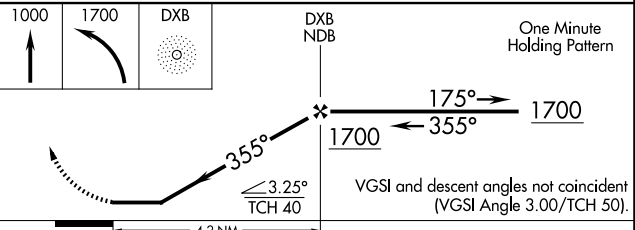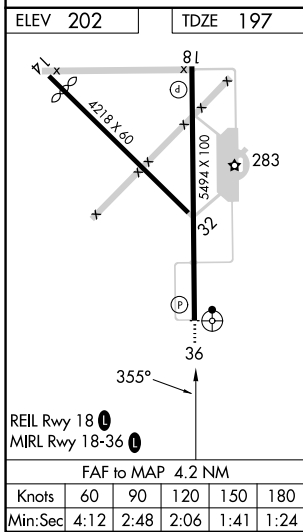

CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025