

WAAS CH <b>72628</b> <b>W36A</b>	APP CRS <b>358°</b>	Rwy Idg TDZE <b>256</b> Apt Elev <b>256</b>	<b>3204</b> <b>256</b> <b>256</b>
--	------------------------	---	---

# RNAV (GPS) RWY 36

JONESBORO (F88)





RNP APCH - GPS

▼ VDP NA when using Ruston altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Ruston altimeter setting and increase all MDAs 60 feet, and LP, LNAV and Circling visibility Cat C ¼ SM.



MISSED APPROACH: Climb to 2400 direct FIMUG and hold.

MONROE APP CON ★  
**126.9 307.9**

CTAF  
**122.9 0**

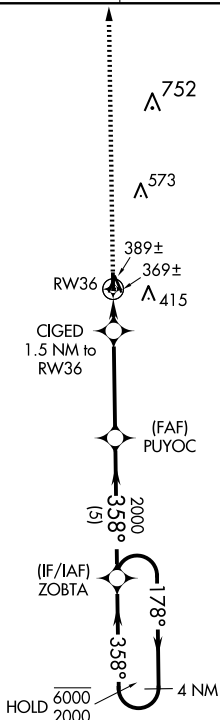

ELEV 256	TDZE 256
----------	----------

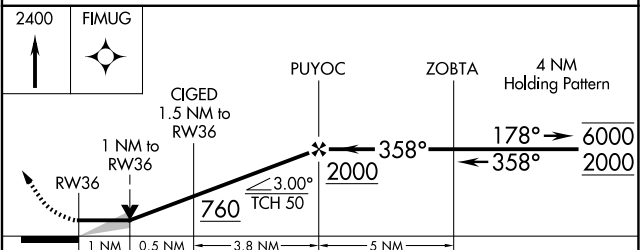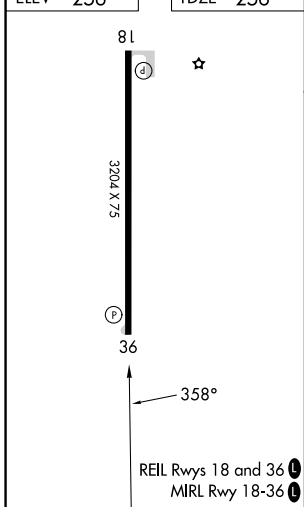

CATEGORY	A	B	C	D
LP MDA	620-1 364 (400-1)			NA
LNAV MDA	640-1	384 (400-1)	640-1½ 384 (400-1½)	NA
CIRCLING	780-1	524 (600-1)	880-1¾ 624 (700-1¾)	NA

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025