

LOC/DME I-TUP 108.5 Chan 22	APP CRS 002°	Rwy Idg TDZE Apt Elev	7150 346 346
---	------------------------	-----------------------------	---

ILS Y or LOC Y RWY 36




TUPELO RGNL (TUP)

⚠ When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 112 feet, increase all MDA 120 feet and increase S-LOC 36 Cats C and D visibility $\frac{3}{8}$ mile. Increase Circling Cats C and D visibility $\frac{1}{2}$ mile. For inop MALSRL when using Columbus AFB altimeter setting, increase S-ILS 36 all Cats visibility $\frac{1}{2}$ mile. GPS and ADF or DME required. VDP NA when using Columbus AFB altimeter setting.

MALSRL

MISSED APPROACH:
Climb to 3000 direct ZUMHA and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER * 118.775 (CTAF) 254.275	GND CON 121.825 254.275	UNICOM 128.85
------------------------	---------------------------------------	--	-----------------------------------	-------------------------

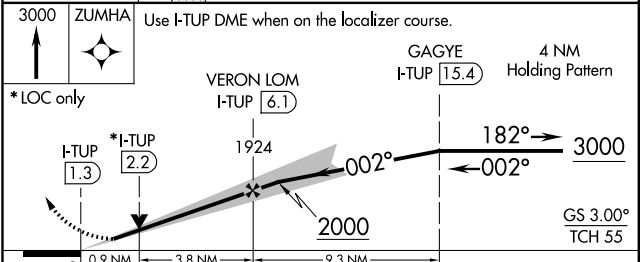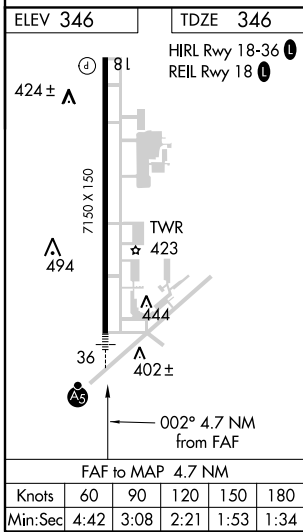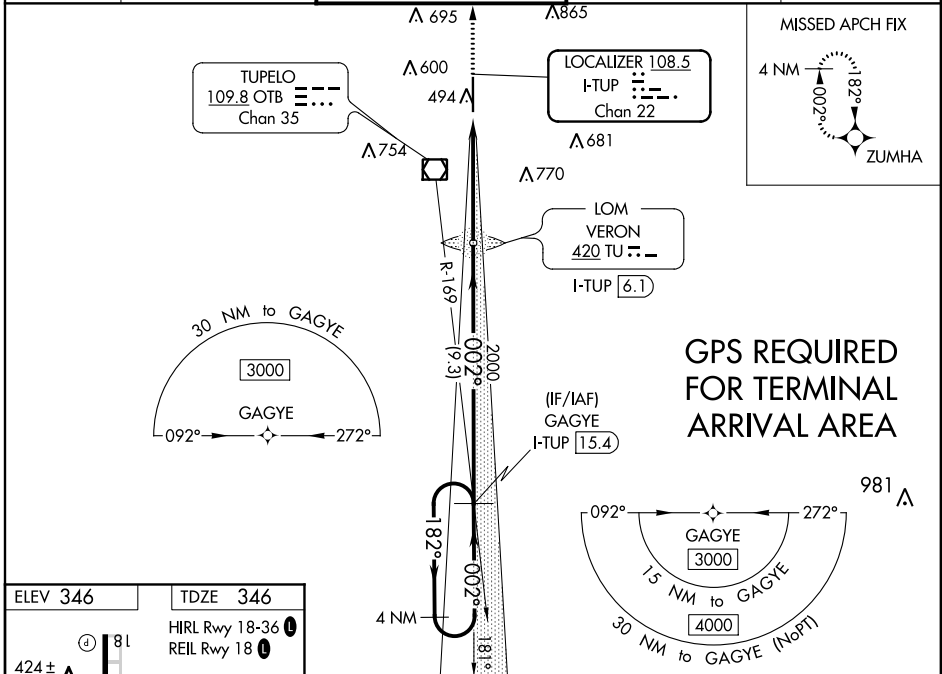

CATEGORY	A	B	C	D
S-ILS 36	546- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)	
S-LOC 36	700- $\frac{1}{2}$	354 (400- $\frac{1}{2}$)	700- $\frac{5}{8}$	354 (400- $\frac{5}{8}$)
C CIRCLING	800-1	454 (500-1)	900-1 $\frac{1}{2}$ 554 (600-1 $\frac{1}{2}$)	1140-2 $\frac{1}{2}$ 794 (800-2 $\frac{1}{2}$)

SC-4, 07 DEC 2017 to 04 JAN 2018

SC-4, 07 DEC 2017 to 04 JAN 2018