


WAAS CH <b>97609</b> <b>W36B</b>	APP CRS <b>006°</b>	Rwy Idg <b>11000</b> TDZE <b>850</b> Apt Elev <b>896</b>
--	------------------------	--

# RNAV (GPS) Y RWY 36C


CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Simultaneous approach authorized with Rwy 36L/R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.	ALSF-2 	MISSED APPROACH: Climb to 3000 direct LOGOZ and on track 007° to NEATS and hold.
---	------------	--

D-ATIS ARR <b>134.375</b> DEP <b>135.3</b>	CINCINNATI APP CON <b>119.7 363.15</b> (090°-269°) <b>123.875 363.15</b> (270°-089°)	CINCINNATI TOWER <b>118.975 360.85</b> (RWY 18L/36R) <b>118.3</b> (RWYS 18C/36C, 09/27) <b>133.325</b> (RWY 18R/36L)	GND CON <b>121.7</b>	CLNC DEL <b>127.175</b>	CPDLC
---	--	---	-------------------------	----------------------------	-------

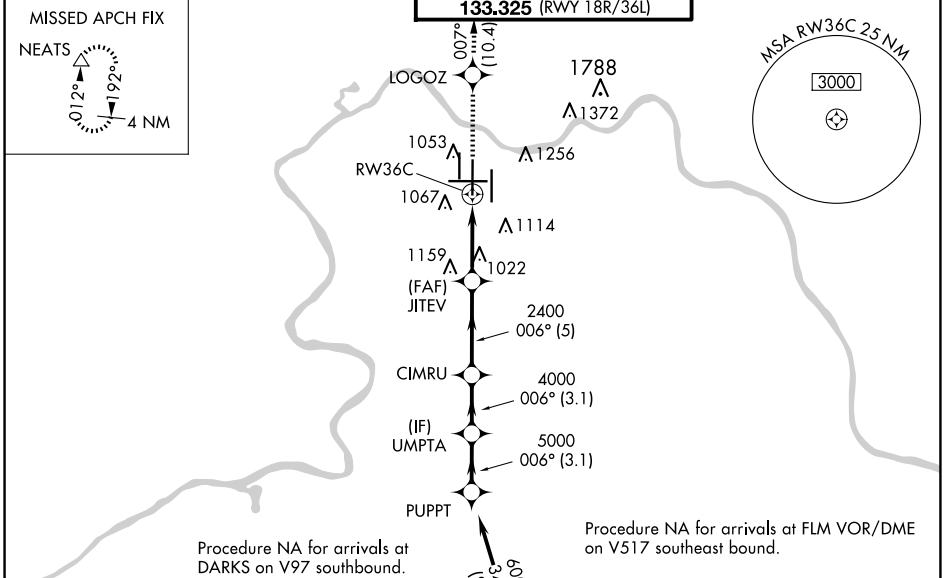

ELEV <b>896</b>	<b>D</b>	TDZE <b>850</b>
HIRL all Rwys TDZ/CL all Rwys except 27		

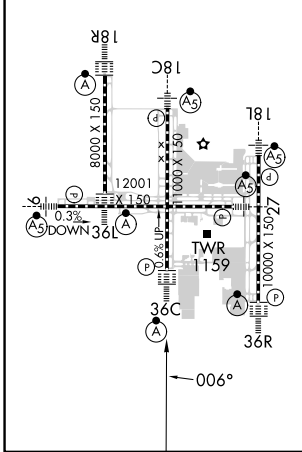

3000	LOGOZ	NEATS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).	
↑				
	tr 007°			
			PUPPT	
			UMPTA	
			CIMRU	
			JITEV	
			RW36C	
			6000	
			GP 3.00°	
			TCH 52	
			1.5 NM	
			3.2 NM	
			5 NM	
			3.1 NM	
			3.1 NM	
CATEGORY	A	B	C	D
LPV DA		1050/18	200 (200-½)	
LNAV/VNAV DA		1346/50	496 (500-1)	
LNAV MDA	1400/24	550 (600-½)	1400/60	549 (600-1¼)
<input checked="" type="checkbox"/> CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)

SE-1, 15 MAY 2025 to 12 JUN 2025

SE-1, 15 MAY 2025 to 12 JUN 2025