
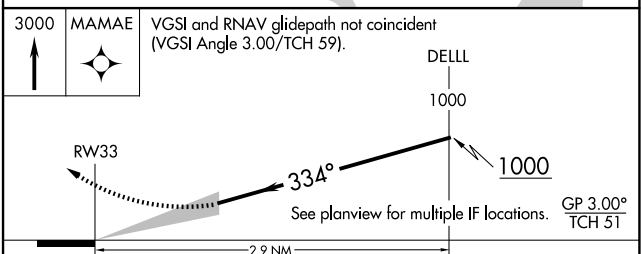
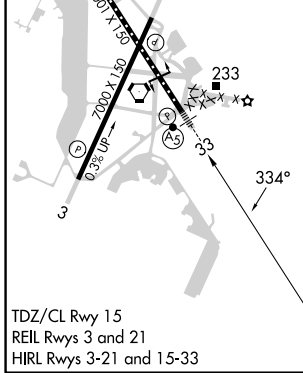


APP CRS	Rwy Idg	9001
334°	TDZE	45
	Apt Elev	46

RNAV (RNP) Z RWY 33

CHARLESTON AFB/INTL (CHS)

RNP AR APCH. RF required.		MALSR	MISSED APPROACH: Climb to 3000 direct MAMAE and hold, continue to climb-in-hold to 3000.					
For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.23 all Cats visibility to RVR 5500.			D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
	124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65			

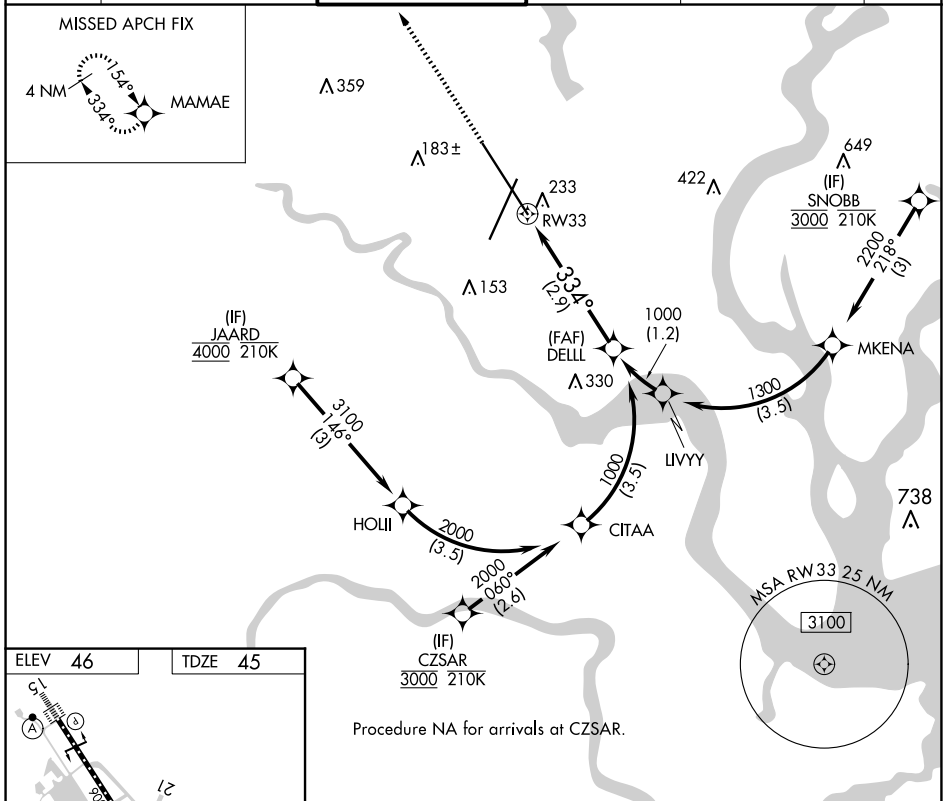

CATEGORY	A	B	C	D
RNP 0.23 DA		419/35	374 (400- ³ / ₄)	
RNP 0.30 DA		477/40	432 (500- ³ / ₄)	

AUTHORIZATION REQUIRED

SE-2, 15 MAY 2025 to 12 JUN 2025

SE-2, 15 MAY 2025 to 12 JUN 2025