ILS or LOC RWY 36L

CHARLOTTE/DOUGLAS INTL (CLT)

LOC/DME I-XUU	APP CRS	Rwy Idg	9000
110.15	003°	TDZE	744
Chan 38(Y)		Apt Elev	748

▼ Circling NA at night. Simultaneous approach authorized.
▲ DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on CLT VOR/DME R-310 to BUDKE/CLT 16 DME and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER			GND CON		CLNC DEL
ARR 121.15	(001°-119°)	128.32	(Rwys 18L-36R)	118.1	257.8	121.8	348.6 (WEST)	127.15
DEP 132.1	(120°-295°)	120.05	(Rwy 18C-36C)	126.4	257.8	121.9	348.6 (EAST)	348.6
	(296°-360°)	134.75	(Rwy 18R-36L)	133.35	257.8			CPDLC
	(180°-359°)	257.2						
	(360°-179°)	307.8						

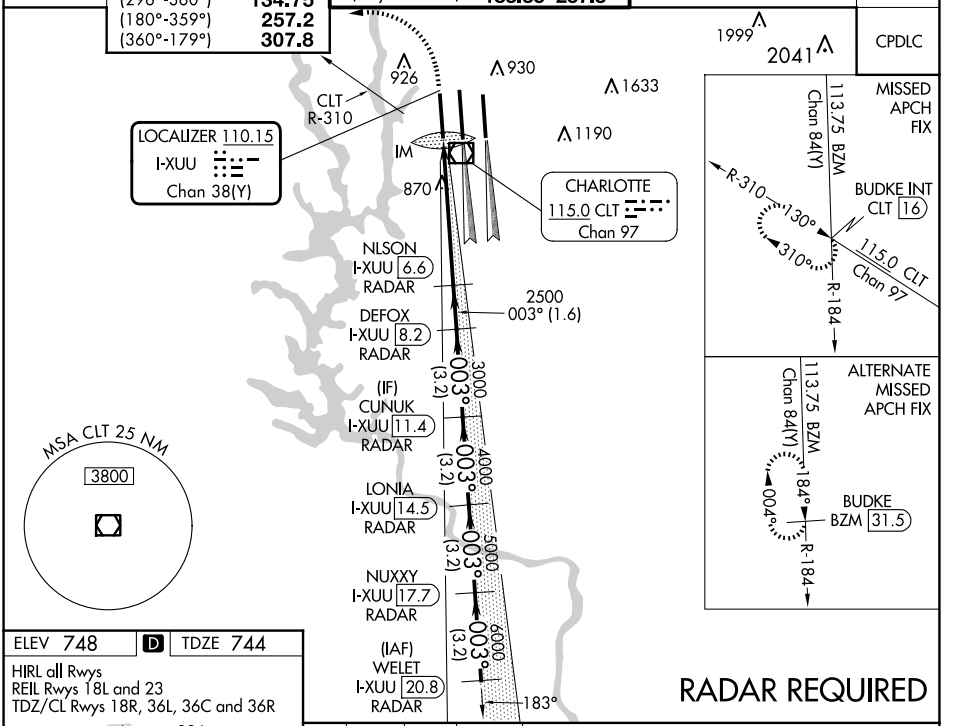

RADAR REQUIRED

ELEV 748 D TDZE 744

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

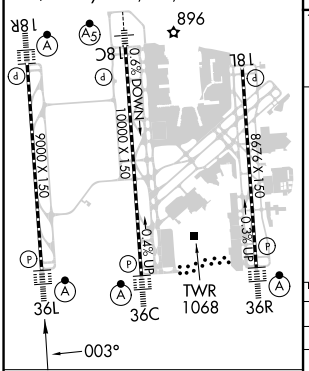

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

1200 4000 CLT R-310 BUDKE INT

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).

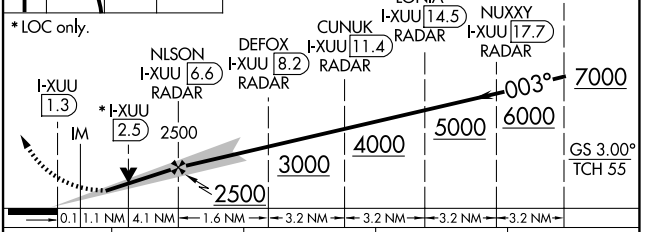

CATEGORY	A	B	C	D
S-ILS 36L	944/18 200 (200-½)			
S-LOC 36L	1180/24 436 (500-½)		1180/40 436 (500-¾)	
C CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

SE-2, 15 MAY 2025 to 12 JUN 2025
SE-2, 15 MAY 2025 to 12 JUN 2025