

|                                                      |                        |                                                               |
|------------------------------------------------------|------------------------|---------------------------------------------------------------|
| LOC/DME I-RBW<br><b>110.15</b><br>Chan <b>38</b> (Y) | APP CRS<br><b>229°</b> | Rwy Idg <b>6002</b><br>TDZE <b>101</b><br>Apt Elev <b>101</b> |
|------------------------------------------------------|------------------------|---------------------------------------------------------------|

# ILS Z or LOC Z RWY 23

LOWCOUNTRY RGNL (R.BW)


**▼** Inop table does not apply to S-LOC 23 Cat C. GPS and DME required. Helicopter visibility reduction below 3/4 SM NA. VDP NA with Charleston AFB/Intl altimeter setting. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting: increase S-ILS 23 DA to 379 feet and all MDA 80 feet; increase S-LOC 23 Cats C/D visibility 1/8 mile and Circling Cat C visibility 1/2 mile and Circling Cat D visibility 1/4 mile. For inop ODALS when using Charleston AFB/Intl altimeter setting, increase S-ILS 23 all Cats visibility to 1/8 mile and S-LOC 23 Cat D visibility to 1 1/8 mile.

ODALS





**MISSED APPROACH:**  
Climb to 1500 then climbing right turn to 2000 direct STOAS and hold.

|                            |                                            |                                        |
|----------------------------|--------------------------------------------|----------------------------------------|
| AWOS-3PT<br><b>118.725</b> | CHARLESTON APP CON<br><b>120.7 306.925</b> | UNICOM<br><b>122.8</b> (CTAF) <b>0</b> |
|----------------------------|--------------------------------------------|----------------------------------------|

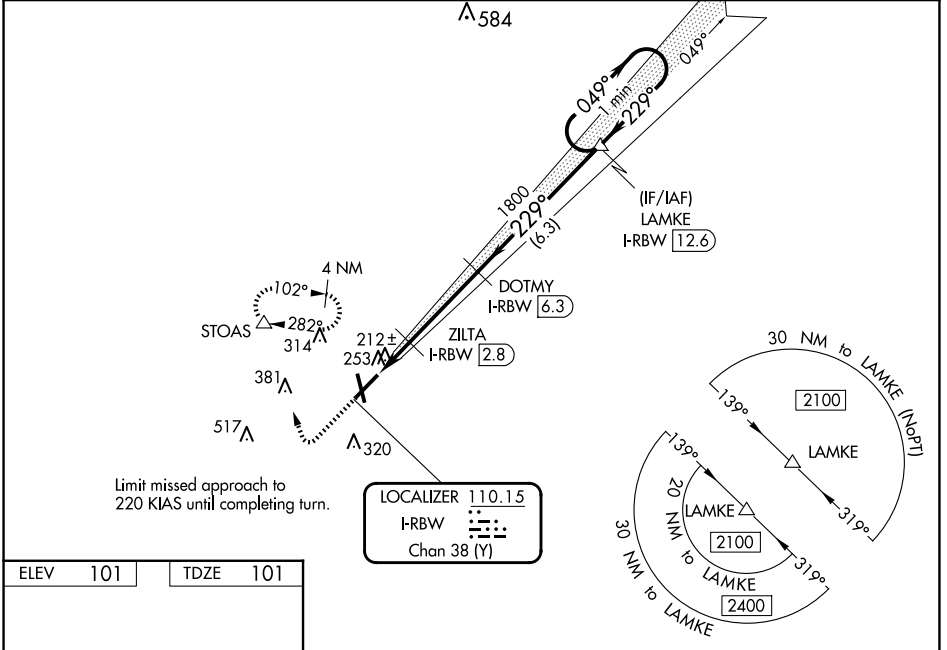

|      |     |      |     |
|------|-----|------|-----|
| ELEV | 101 | TDZE | 101 |
|------|-----|------|-----|

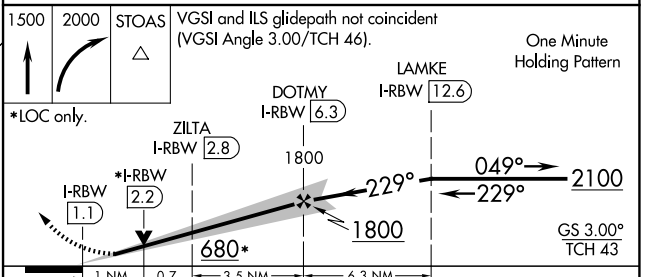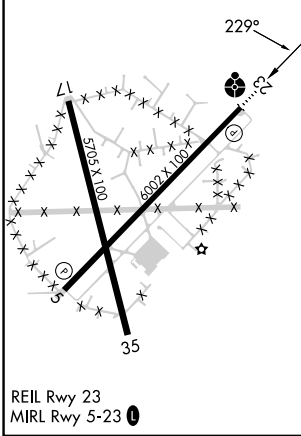

| CATEGORY          | A                     | B                    | C                            | D                    |
|-------------------|-----------------------|----------------------|------------------------------|----------------------|
| S-ILS 23          | 301-3/4 200 (200-3/4) |                      |                              |                      |
| S-LOC 23          | 480-3/4               | 379 (400-3/4)        | 480-1                        | 379 (400-1)          |
| <b>C</b> CIRCLING | 620-1<br>519 (600-1)  | 640-1<br>539 (600-1) | 700-1 1/2<br>599 (600-1 1/2) | 700-2<br>599 (600-2) |

SE-2, 15 MAY 2025 to 12 JUN 2025

SE-2, 15 MAY 2025 to 12 JUN 2025