

VORTAC OMN 112.6 Chan 73	APP CRS 161°	Rwy Idg TDZE Apt Elev	3704 27 29
--	------------------------	-----------------------------	---------------------------------------


VOR RWY 17

ORMOND BEACH MUNI (OMN)


NA When local altimeter setting not received, use Daytona Beach Intl altimeter setting and increase all MDA 20 feet and increase S-17 Cat C visibility to 1 3/4 mile. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 1000 then climbing left turn to 1600 direct OMN VORTAC and hold.


ATIS 118.475	DAYTONA APP CON 125.8 269.075	ORMOND BEACH TOWER* 119.075 (CTAF) 0	GND CON 121.625	CLNC DEL 121.625	UNICOM 123.05
------------------------	---	---	---------------------------	----------------------------	-------------------------

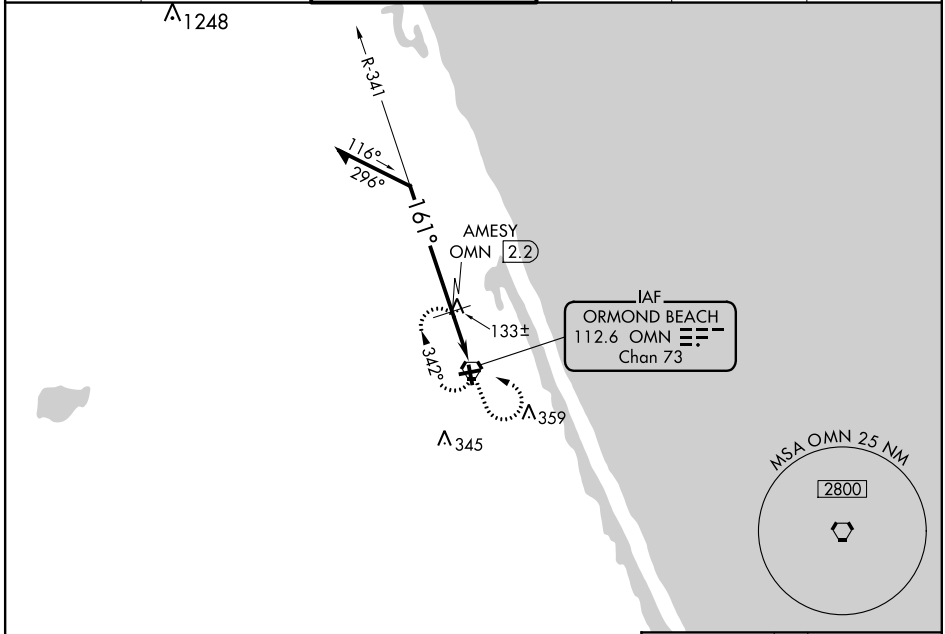

ELEV 29	TDZE 27
----------------	----------------

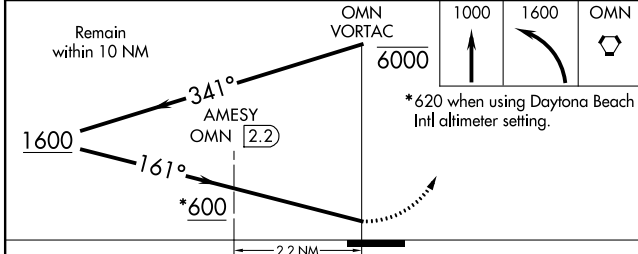

ELEV 29	TDZE 27
----------------	----------------

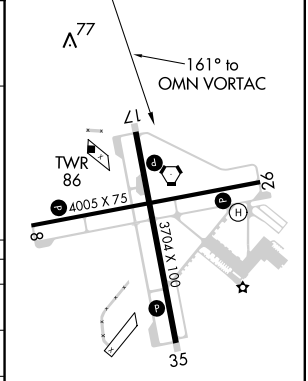

CATEGORY	A	B	C	D
S-17	600-1	573 (600-1)	600-1 3/8 573 (600-1 3/8)	NA
C CIRCLING	600-1	571 (600-1)	740-2 712 (800-2)	NA
AMESY FIX MINIMUMS				
S-17	480-1	453 (500-1)	480-1 3/8 453 (500-1 3/8)	NA
C CIRCLING	500-1	472 (500-1)	740-2 712 (800-2)	NA

REIL Rwy 8, 17, 26, and 35 **0**
 MIRL Rwy 8-26 and 17-35 **0**