VOR RWY 17

ORMOND BEACH MUNI (OMN)

VORTAC OMN	APP CRS	Rwy Idg	3704
112.6	161°	TDZE	27
Chan 73		Apt Elev	29

When local altimeter setting not received, use Daytona Beach Intl altimeter setting and increase all MDA 20 feet and increase S-17 Cat C visibility to 1¾ mile. Helicopter visibility reduction below ¾ SM NA.

NA

MISSED APPROACH: Climb to 1000 then climbing left turn to 1600 direct OMN VORTAC and hold.

ATIS	DAYTONA APP CON	ORMOND BEACH TOWER★	GND CON	CLNC DEL	UNICOM
118.475	125.8 269.075	119.075 (CTAF) L	121.625	121.625	123.05

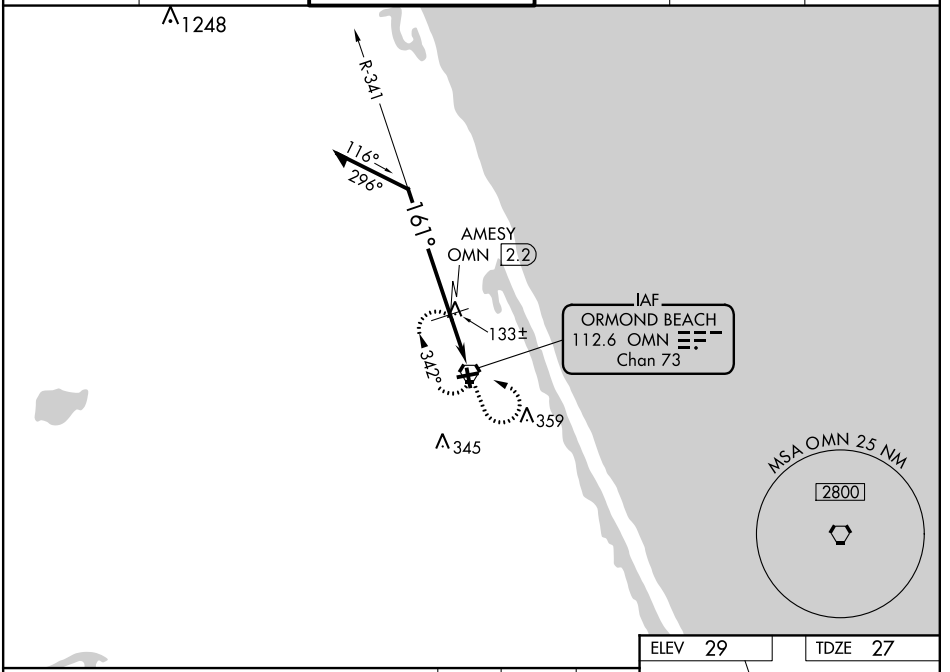

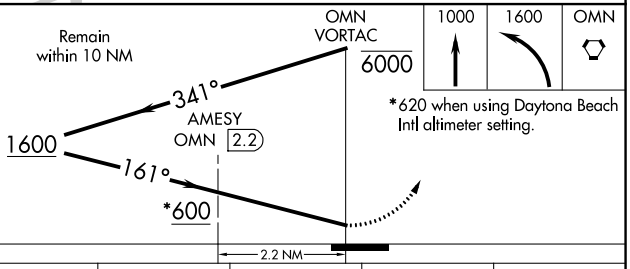

CATEGORY	A	B	C	D
S-17	600-1	573 (600-1)	600-1⅝ 573 (600-1⅝)	NA
C CIRCLING	600-1	571 (600-1)	740-2 712 (800-2)	NA
AMESY FIX MINIMUMS				
S-17	480-1	453 (500-1)	480-1⅜ 453 (500-1⅜)	NA
C CIRCLING	500-1	472 (500-1)	740-2 712 (800-2)	NA

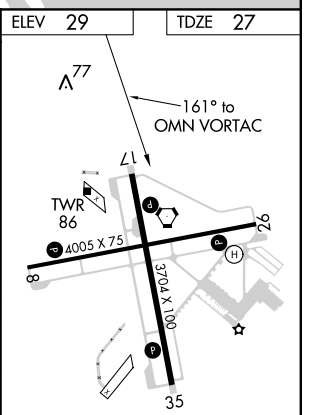

REIL Rwys 8, 17, 26, and 35 L
MIRL Rwys 8-26 and 17-35 L

SE-3, 01 FEB 2018 to 01 MAR 2018
SE-3, 01 FEB 2018 to 01 MAR 2018