

LOC/DME I-OLX 111.55 Chan 52 (Y)	APP CRS 128°	Rwy Idg TDZE Apt Elev	6000 8 8
---	------------------------	-----------------------------	-------------------------------------

ILS or LOC RWY 12

MIAMI-OPA LOCKA EXEC (OPF)


⚠ Inop table does not apply to S-ILS 12. Helicopter visibility reduction below ¾ SM NA. VDP NA with Miami Intl altimeter setting. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet and Circling Cat D visibility ¼ SM. For inop MALSR, increase S-LOC 12 Cats A and B visibility to 1 mile and Cats C and D visibility to 1½ miles.

MALSR


MISSED APPROACH: Climb to 800 then climbing left turn to 2000 on heading 090° and DHP VORTAC R-069 to JANUS INT/DHP 42.5 DME and hold.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER * 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
----------------------	---------------------------------------	--	---------------------------	--------------------------	----------------------


RADAR REQUIRED

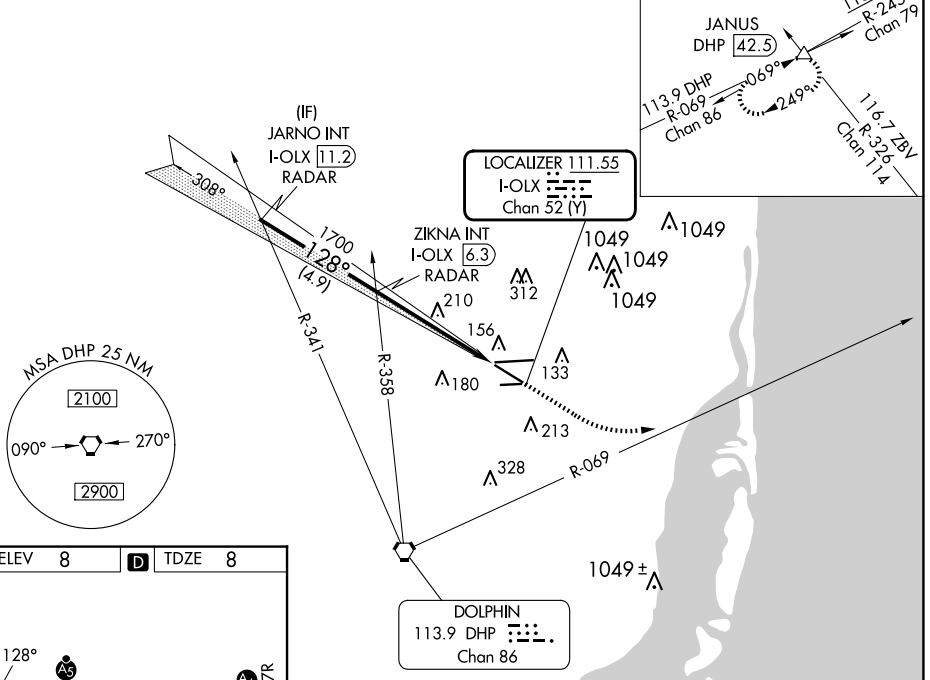

ELEV 8	D	TDZE 8
--------	----------	--------



MIRL Rwy 9R-27L	
HIRL Rwys 9L-27R and 12-30	0
FAF to MAP 5.2 NM	
Knots	60 90 120 150 180
Min:Sec	5:12 3:28 2:36 2:05 1:44

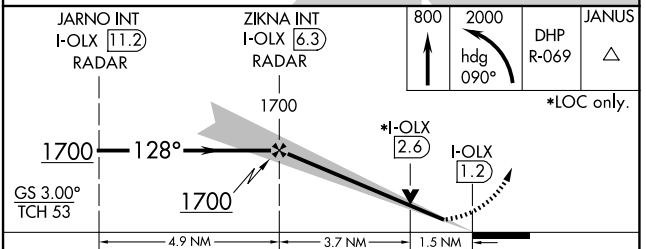

CATEGORY	A	B	C	D
S-ILS 12	208-¾ 200 (200-¾)			
S-LOC 12	520-¾	512 (600-¾)	520-1	512 (600-1)
CIRCLING	540-1	532 (600-1)	620-1¾ 612 (700-1¾)	740-2¼ 732 (800-2¼)

SE-3, 15 MAY 2025 to 12 JUN 2025

SE-3, 15 MAY 2025 to 12 JUN 2025