

LOC/DME I-PLJ 111.35 Chan 50 (Y)	APP CRS 273°	Rwy Idg TDZE Apt Elev	8002 8 8
---	------------------------	-----------------------------	-------------------------------------

ILS or LOC RWY 27R

OPA-LOCKA EXECUTIVE (OPF)

▼ DME Required.
▲ When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet.
 For inop MALS, increase S-ILS 27R all Cats visibility to ¾ mile and S-LOC Cats C/D visibility to 1 ½ mile.
 Helicopter visibility reduction below ¾ SM NA.

MALS





MISSED APPROACH: Climb to 2000 heading 273° and DHP VORTAC R-335 to BRBRA/DHP 11.5 DME and hold.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2
----------------------	---------------------------------------	--	---------------------------	--------------------------

RADAR REQUIRED


ALTERNATE MISSED APCH FX

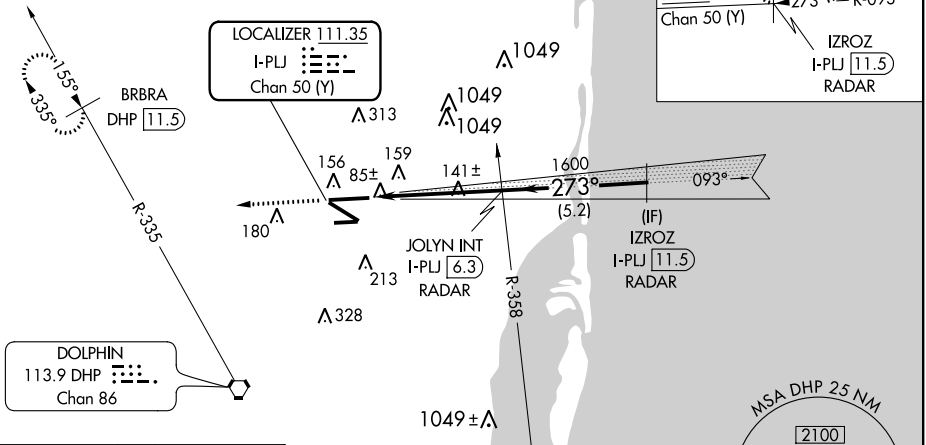

SE-3, 01 MAR 2018 to 29 MAR 2018

SE-3, 01 MAR 2018 to 29 MAR 2018

ELEV 8	D	TDZE 8
--------	---	--------

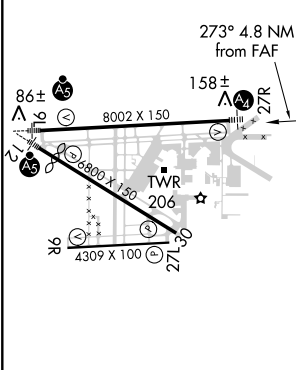

MIRL Rwy 9R-27L
HIRL Rwys 9L-27R and 12-30

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

CATEGORY	A				B		C		D	
S-ILS 27R	291-¾ 283 (300-¾)									
S-LOC 27R	420-¾		412 (500-¾)		420-1		412 (500-1)			
CIRCLING	540-1		532 (600-1)		540-1½		532 (600-1½)		552 (600-2)	