

WAAS CH 72900 W09A	APP CRS 093°	Rwy Idg THRE 10 Apt Elev 10	6000
----------------------------------------	------------------------	-------------------------------------------------	-------------

RNAV (GPS) RWY 9R




MIAMI EXECUTIVE (TMB)

⚠ Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). For inop MALSR, increase LNAV/VNAV all Cats visibility to ¾. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Miami Intl altimeter setting. When local altimeter setting not received, use Miami Intl altimeter setting and increase LPV DA to 237, LNAV/VNAV DA to 329 and all MDA 40 feet, increase LNA Cats C/D visibility ½ mile and Circling Cat D visibility ½ mile.

MALSR
AS

MISSED APPROACH:
Climb to 3000 direct JURER and hold, continue climb-in-hold to 3000.

ATIS 124.0	MIAMI APP CON 125.5 354.1	TAMIAMI TOWER ★ 118.9 (CTAF) 0	GND CON 121.7	CLNC DEL 133.0
----------------------	-------------------------------------	-------------------------------------------------	-------------------------	--------------------------

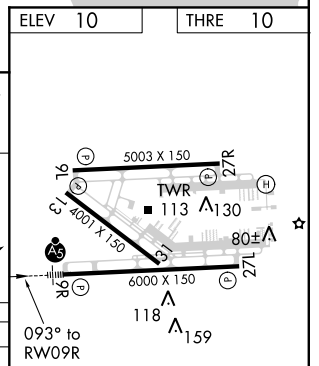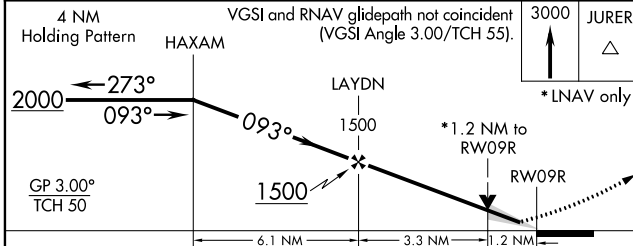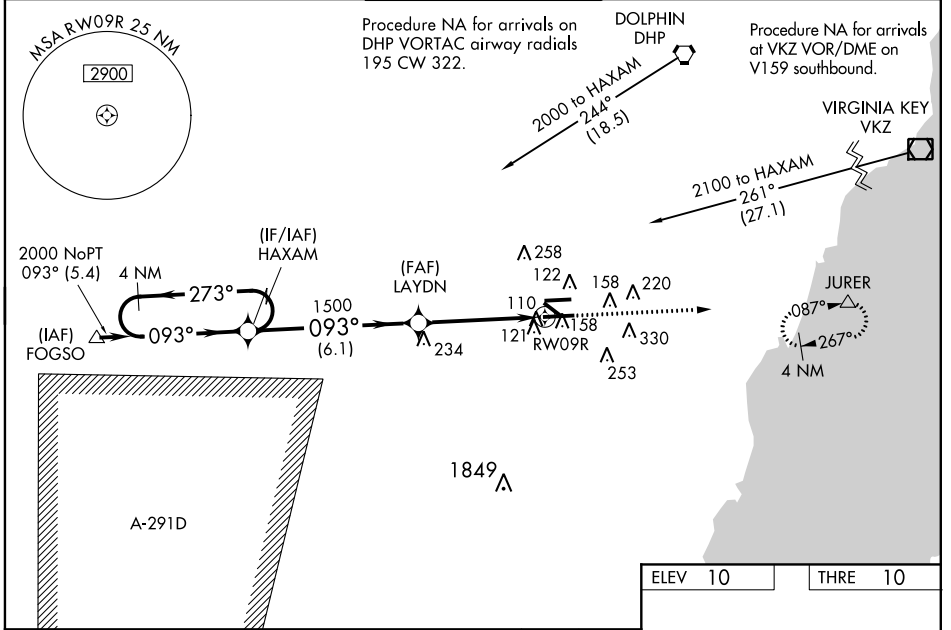

CATEGORY	A	B	C	D
LPV DA		210-½ 200 (200-½)		
LNAV/VNAV DA		302-½ 292 (300-½)		
LNAV MDA	460-½ 450 (500-½)		460-⅞ 450 (500-⅞)	
CIRCLING	460-1 450 (500-1)		460-1⅛ 450 (500-1⅛)	640-2 630 (700-2)

REIL Rwy 13
HIRL Rwy 9R-27L
MIRL Rws 9L-27R and 13-31

SE-3, 27 APR 2017 to 25 MAY 2017

SE-3, 27 APR 2017 to 25 MAY 2017