

WAAS CH 56400 W27A	APP CRS 273°	Rwy Idg THRE 8 Apt Elev 10	6000
--	------------------------	--	-------------


RNAV (GPS) RWY 27L

MIAMI EXECUTIVE (TMB)

⚠ Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Miami Intl altimeter setting and increase LPV DA to 235 feet LNAV/VNAV DA to 368 and all MDA 40 feet, increase LNAV Cats C/D visibility ¼ mile and Circling Cat D visibility ¼ mile. VDP and Baro-VNAV NA when using Miami Intl altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
HAXAM and hold.



ATIS 124.0	MIAMI APP CON 125.5 354.1	TAMIAMI TOWER * 118.9 (CTAF) 0	GND CON 121.7	CLNC DEL 133.0
----------------------	-------------------------------------	---	-------------------------	--------------------------

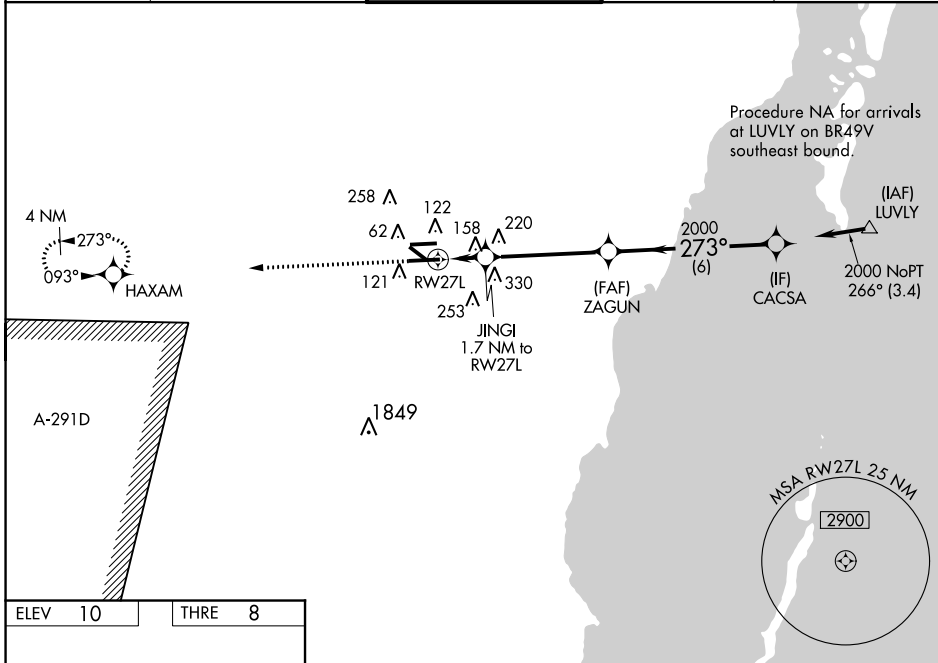

SE-3, 27 APR 2017 to 25 MAY 2017

SE-3, 27 APR 2017 to 25 MAY 2017

ELEV 10	THRE 8
---------	--------

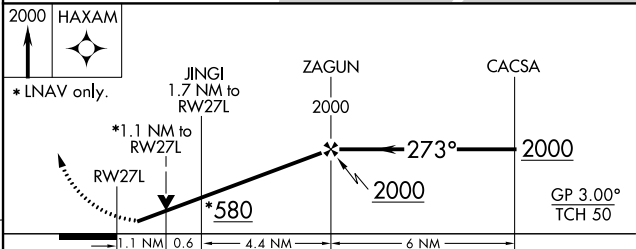

CATEGORY	A	B	C	D
LPV DA		208-¾	200 (200-¾)	
LNAV/VNAV DA		341-1½	333 (400-1½)	
LNAV MDA	420-1	412 (500-1)	420-1½	412 (500-1½)
CIRCLING	460-1	450 (500-1)	460-1½ 450 (500-1½)	640-2 630 (700-2)

REIL Rwy 13
HIRL Rwy 9R-27L **0**
MIRL Rwy 9L-27R and 13-31