

| | | | |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------|
| WAAS CH 93615 W27B | APP CRS 273° | Rwy Idg TDZE Apt Elev | 5003 8 8 |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------|




RNAV (GPS) RWY 27R

MIAMI EXECUTIVE (TMB)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Intl altimeter setting and adjust all DA 27 feet and all MDA 40 feet; increase LPV all Cats visibility ¼ mile, LNAV Cat D visibility ¼ mile, and Circling Cat D visibility ¼ mile. Baro-VNAV NA when using Miami Intl altimeter setting. Circling to Rwy 13, 31 NA at night.

MISSED APPROACH: Climb to 2000 direct JULED and hold.

| | | | | |
|----------------------|-------------------------------------|------------------------------------------|-------------------------|--------------------------|
| ATIS 124.0 | MIAMI APP CON 125.5 354.1 | TAMIAMI TOWER ★ 118.9 (CTAF) 0 | GND CON 121.7 | CLNC DEL 133.0 |
|----------------------|-------------------------------------|------------------------------------------|-------------------------|--------------------------|

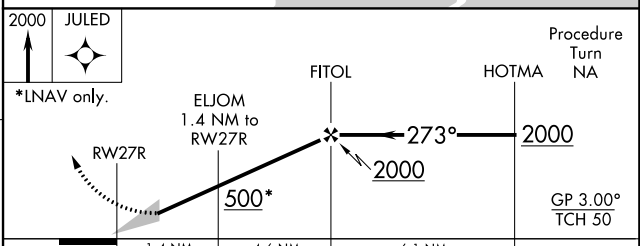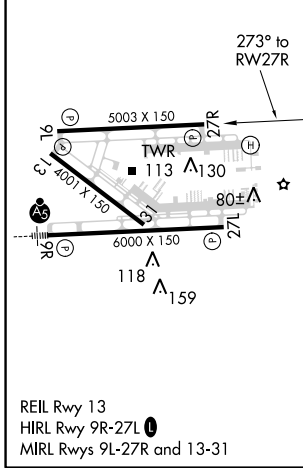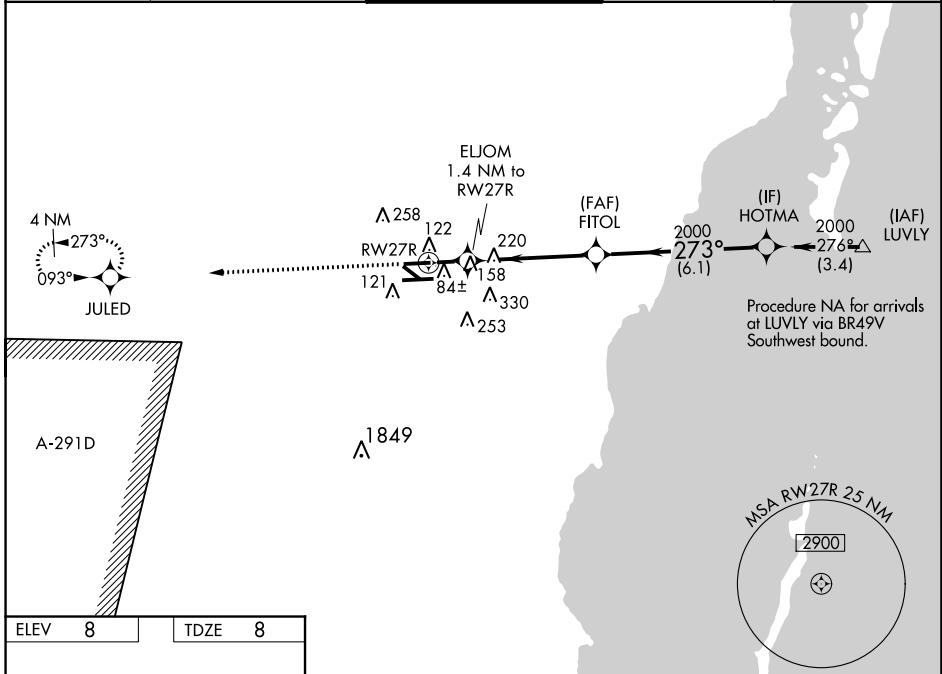

| CATEGORY | A | B | C | D |
|--------------|----------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------|------------------------------------------|
| LPV DA | 258- ³ / ₄ 250 (300- ³ / ₄) | | | |
| LNAV/VNAV DA | 352-1 ¹ / ₄ 344 (400-1 ¹ / ₄) | | | |
| LNAV MDA | 420-1 | 412 (500-1) | 420-1 ¹ / ₄ | 412 (500-1 ¹ / ₄) |
| CIRCLING | 460-1 | 452 (500-1) | 460-1 ¹ / ₂ 452 (500-1 ¹ / ₂) | 640-2 632 (700-2) |

SE-3, 12 OCT 2017 to 09 NOV 2017

SE-3, 12 OCT 2017 to 09 NOV 2017