RNAV (GPS) RWY 12R

VERO BEACH RGNL (VRB)

WAAS CH 53511 W12A	APP CRS 118°	Rwy Idg 7314 TDZE 23 Apt Elev 24

T
A

Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 302 feet; increase LNAV/VNAV DA to 317 feet; increase all MDAs 40 feet and LNAV Cat C/D visibility ⅛ SM and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct PUUMA and hold.

ATIS	PALM BEACH APP CON	VERO BEACH TOWER ★	GND CON	CLNC DEL	UNICOM
120.575	123.625 225.4 (N)	126.3 (CTAF) L	127.45	134.975	122.95

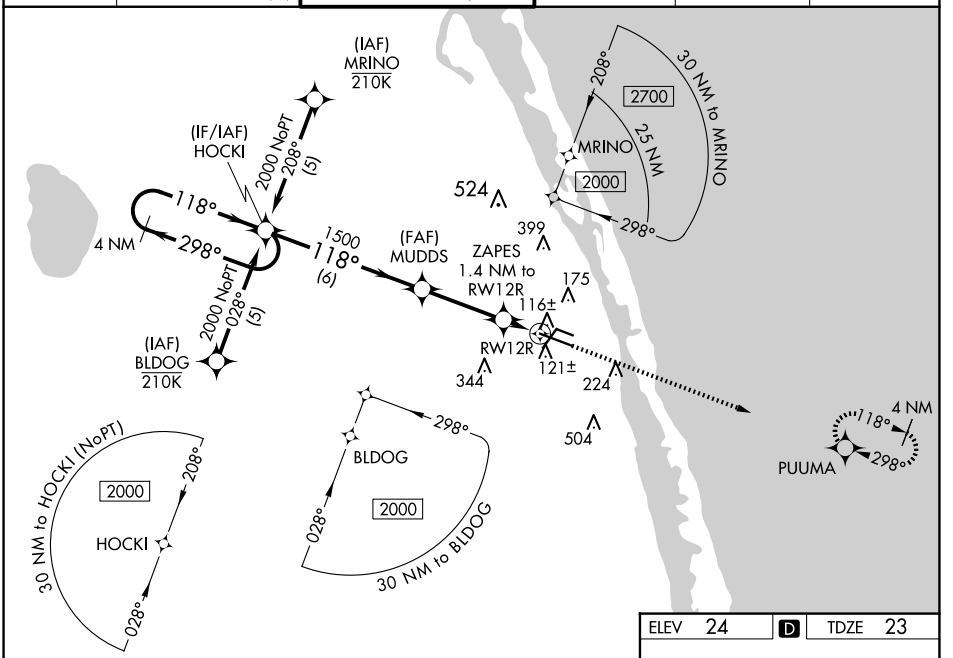

ELEV 24 D TDZE 23

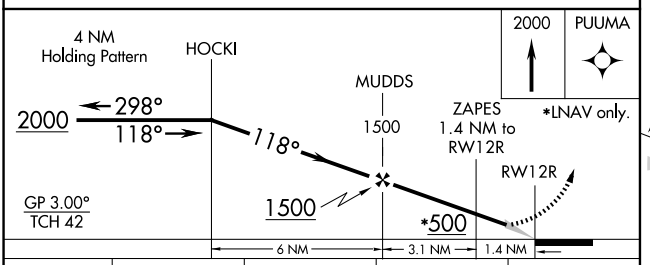



CATEGORY	A	B	C	D
LPV DA	279-¾	256 (300-¾)		
LNAV/VNAV DA	294-⅞	271 (300-⅞)		
LNAV MDA	380-1	357 (400-1)		
CIRCLING	560-1	536 (600-1)	660-1¾ 636 (700-1¾)	820-2½ 796 (800-2½)

MIRL Rwys 4-22, 12R-30L, and 12L-30R L
REIL Rwys 4, 12R, 22 and 30L L

SE-3, 15 MAY 2025 to 12 JUN 2025
SE-3, 15 MAY 2025 to 12 JUN 2025