


LOC/DME I-BRU 108.7 Chan 24	APP CRS 275°	Rwy Idg TDZE Apt Elev	26L 9999 996 1026	26R 8500 990 1026
--	------------------------	-----------------------------	---	---

ILS or LOC RWY 26L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)



RADAR required.

▼ Inop table does not apply to sidestep Rwy 26R Cats A and B. For inop ALS, increase S-ILS 26L all Cats visibility to RVR 4500 and S-LOC 26L Cat E visibility to RVR 6000. For inop ALS to Rwy 26R, increase sidestep 26R Cat E visibility to 2 SM. Simultaneous approach authorized.





MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on heading 290° and RGM R-132 to DALAS INT/RMG VORTAC 18.5 DME and hold.

D-ATIS ARR 119.65	ATLANTA APP CON 127.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS				ALL RWYS	GND CON 8L-26R,8R-26L 9L-27R,9R-27L 10-28	ALL RWYS	
DEP 125.55	127.9	119.1	125.325	123.85	119.3	119.5	121.9	121.65	254.4

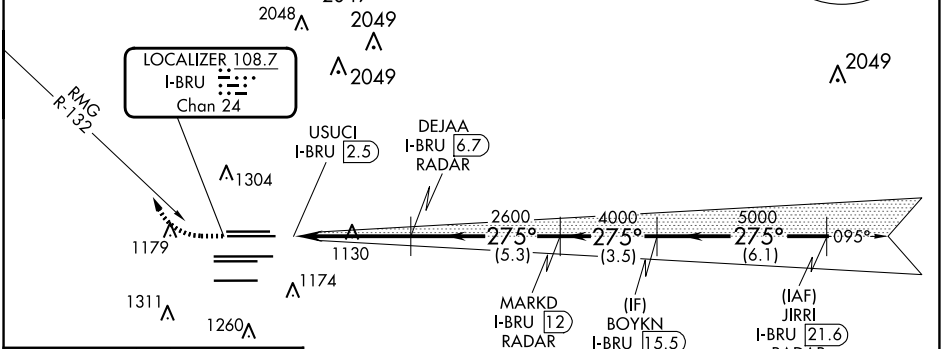

ELEV 1026	D	TDZE 26L 996	TDZE 26R 990
-----------	----------	--------------	--------------

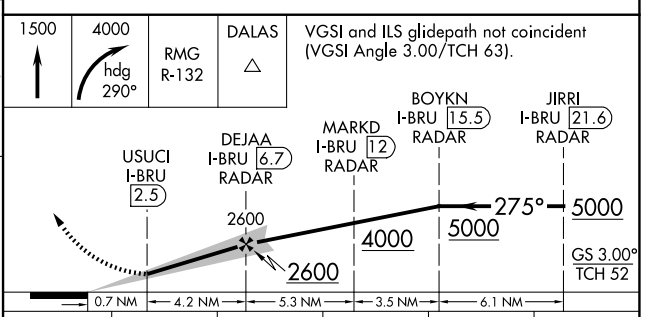

FAF to MAP 4.2 NM	HIRL all Rwy's TDZ/CL Rwy's 8L, 9R, 10, 26R, 27L and 28				
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24
CATEGORY	A	B	C	D	E
S-ILS 26L	1280/24 284 (300-1/2)				
S-LOC 26L	1380/24	384 (400-1/2)	1380/35	384 (400-3/4)	
SIDESTEP 26R	1380/55 390 (400-1)			1380-1 1/2 390 (400-1 1/2)	

SE-4, 15 MAY 2025 to 12 JUN 2025

SE-4, 15 MAY 2025 to 12 JUN 2025