


LOC/DME I-GXZ 110.1 Chan 38	APP CRS 275°	Rwy Idg TDZE Apt Elev	26R 8500 990 1026	26L 9999 996 1026
---	------------------------	-----------------------------	---	---

ILS or LOC RWY 26R



HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RADAR required.		Rwy 26R MALSR	Rwy 26L MALSR	MISSED APPROACH: Climb to 1800 then climbing right turn to 4000 on RMG VORTAC R-132 to DALAS INT/RMG 18.5 DME and hold.
Simultaneous approach authorized. For inop ALS, increase sidestep Rwy 26L Cats A and B visibility ¼ SM.				

D-ATIS ARR 119.65	ATLANTA APP CON DEP 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4				ALL RWYS 254.4	GND CON 9L-27R, 9R-27L 10-28 RWYS 121.9	ALL RWYS 254.4
-----------------------------	--	--	--	--	--	-----------------------------	--	-----------------------------

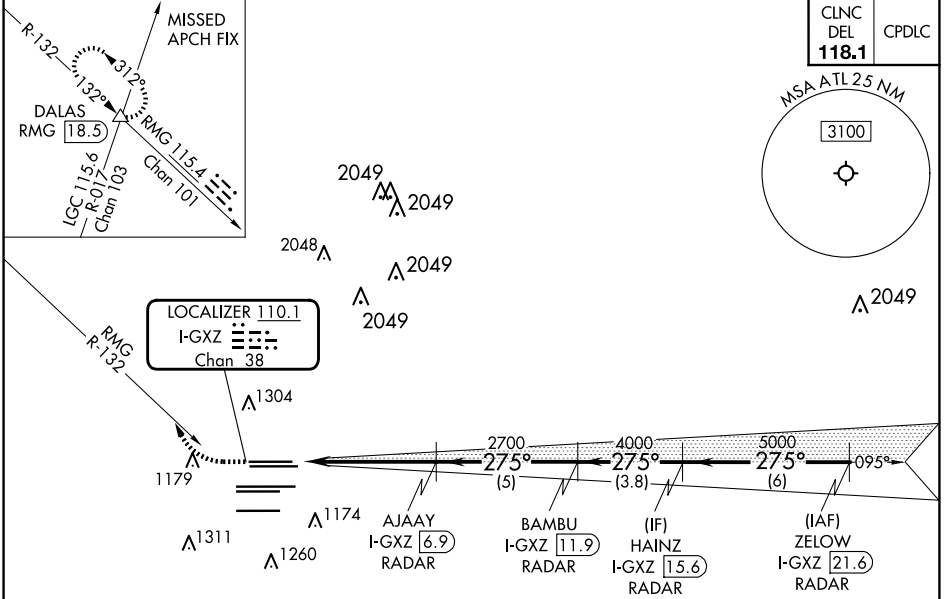

ELEV 1026	D	TDZE 26R 990	TDZE 26L 996
-----------	----------	--------------	--------------

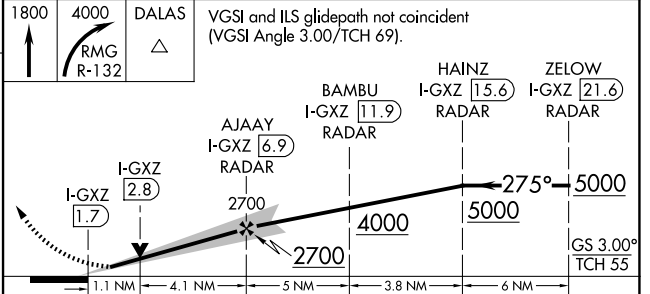

FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44
CATEGORY	A	B	C	D	
S-ILS 26R	1190/18		200 (200-½)		
S-LOC 26R	1420/24	430 (400-½)	1420/40	430 (400-¾)	
SIDESTEP 26L	1420/55	424 (400-1)	1420-1¼ 424 (400-1¼)	1420-1¾ 424 (400-1¾)	

SE-4, 15 MAY 2025 to 12 JUN 2025

SE-4, 15 MAY 2025 to 12 JUN 2025