WAAS CH **61000** **W26B** | APP CRS **275°** | Rwy Idg **8500** TDZE **990** Apt Elev **1026**

# RNAV (GPS) Y RWY 26R

## HARTSFIELD/JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 27R or 27L or 28, or Rwys 27R and 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3500 direct TROYS and hold.

| D-ATIS | ATLANTA | ATLANTA TOWER | | | | | ALL | GND CON | | | ALL |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ARR **119.65** | APP CON | 8L-26R | 8R-26L | 9L-27R | 9R-27L | 10-28 | RWYS | (8L-26R,8R-26L) | (9L-27R,9R-27L) | 10-28 | RWYS |
| DEP **125.55** | **127.9 379.9** | **119.1** | **125.325** | **123.85** | **119.3** | **119.5** | **254.4** | **121.9** | **121.75** | **121.65** | **254.4** |

CLNC DEL **118.1** | CPDLC

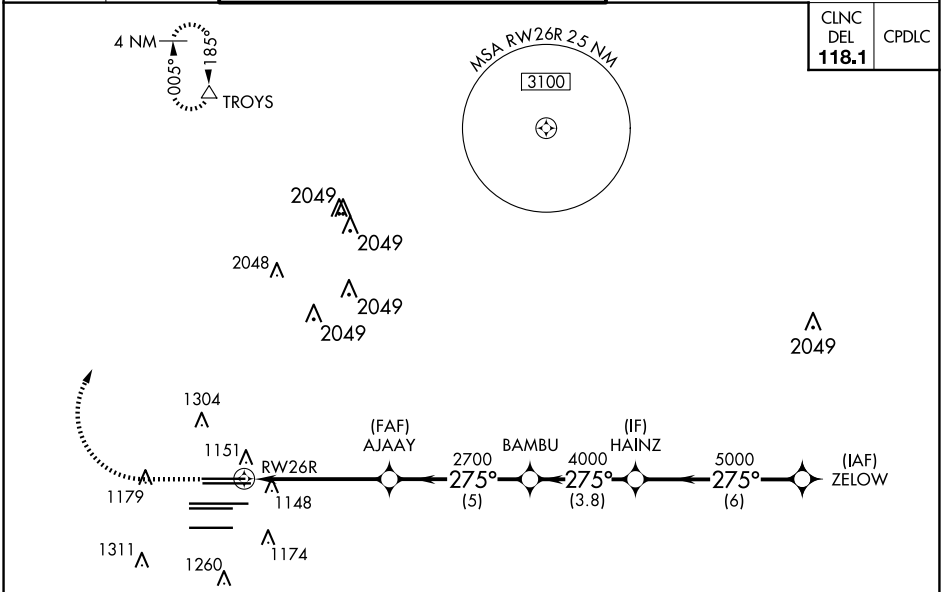


ELEV 1026 | D | TDZE 990

RADAR REQUIRED




HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

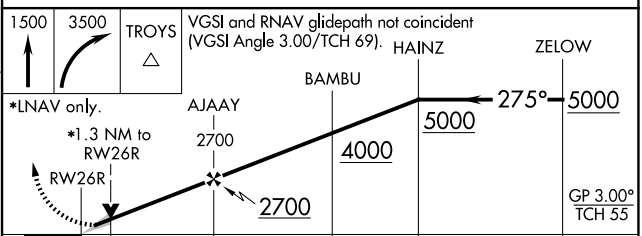


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1190/18 200 (200-½) | | | |
| LNAV/VNAV DA | 1426/50 436 (500-1) | | | |
| LNAV MDA | 1460/24 470 (500-½) | | 1460/50 470 (500-1) | |



SE-4, 15 MAY 2025 to 12 JUN 2025
SE-4, 15 MAY 2025 to 12 JUN 2025