

WAAS CH <b>87101</b> <b>W17A</b>	APP CRS <b>176°</b>	Rwy Idg THRE <b>196</b> Apt Elev <b>203</b>	<b>8002</b>
--	------------------------	---	-------------




# RNAV (GPS) RWY 17

VALDOSTA RGNL (VLD)

**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).  
**▲** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Moultrie altimeter setting and increase all DA 88 feet and all MDA 100 feet and increase LPV all Cats visibility 3/8 mile, LNAV/VNAV all Cats, LNAV and Circling Cats C/D visibilities 1/4 mile. Circling to Rwy 4, 13, and 31 NA at night. Baro-VNAV NA with Moultrie altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

**MISSED APPROACH:**  
 Climb to 2700 direct YUPUY and on track 177° to HADDE and hold.

ASOS <b>126.225</b>	VALDOSTA APP CON * <b>126.6 285.6</b>	VALDOSTA TOWER * <b>120.9 (CTAF) 0</b>	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
------------------------	--	---	-------------------------	-------------------------

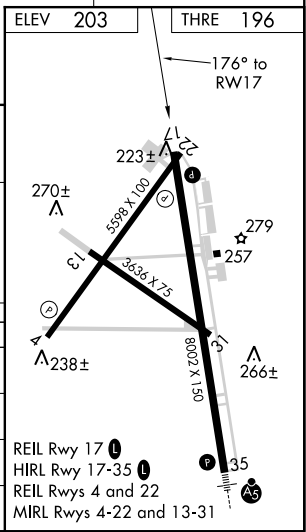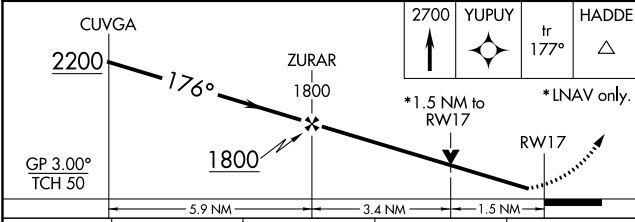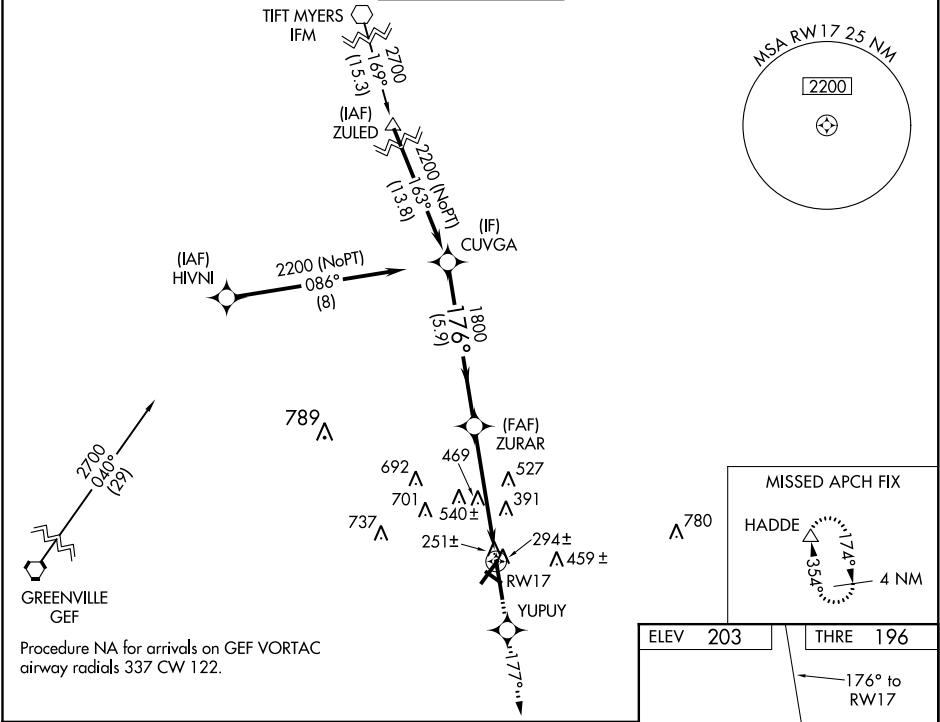

CATEGORY	A	B	C	D
LPV DA		452-3/8	256 (300-3/8)	
LNAV/VNAV DA		455-7/8	259 (300-7/8)	
LNAV MDA	720-1	524 (600-1)	720-1 1/2	524 (600-1 1/2)
CIRCLING	720-1	517 (600-1)	720-1 1/2	780-2 517 (600-1 1/2) 577 (600-2)

SE-4, 22 JUN 2017 to 20 JUL 2017

SE-4, 22 JUN 2017 to 20 JUL 2017