

WAAS CH <b>87101</b> <b>W17A</b>	APP CRS <b>176°</b>	Rwy Idg <b>8002</b> TDZE <b>199</b> Apt Elev <b>203</b>
--	------------------------	---



# RNAV (GPS) RWY 17

VALDOSTA RGNL (VLD)


**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).  
**▲** Circling Rwy 4, 13, 31 NA at night. Rwy 17 helicopter visibility reduction below 3/4 SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Moultrie altimeter setting: increase LPV DA to 542 feet and all visibilities 3/8 SM; increase LNAV/VNAV DA to 546 and all visibilities 1/4 SM; increase all MDA 100 feet and visibility Cat C and D 1/4 SM. Baro-VNAV and VDP NA when using Moultrie altimeter setting.

**MISSED APPROACH:**  
 Climb to 2700 direct YUPUY and on track 177° to HADDE and hold.

ASOS <b>126.225</b>	VALDOSTA APP CON* <b>126.6 285.6</b>	VALDOSTA TOWER* <b>120.9 (CTAF) 0</b>	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
------------------------	---	--	-------------------------	-------------------------

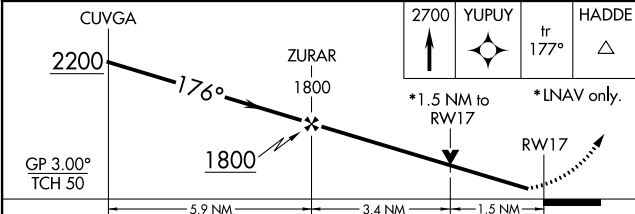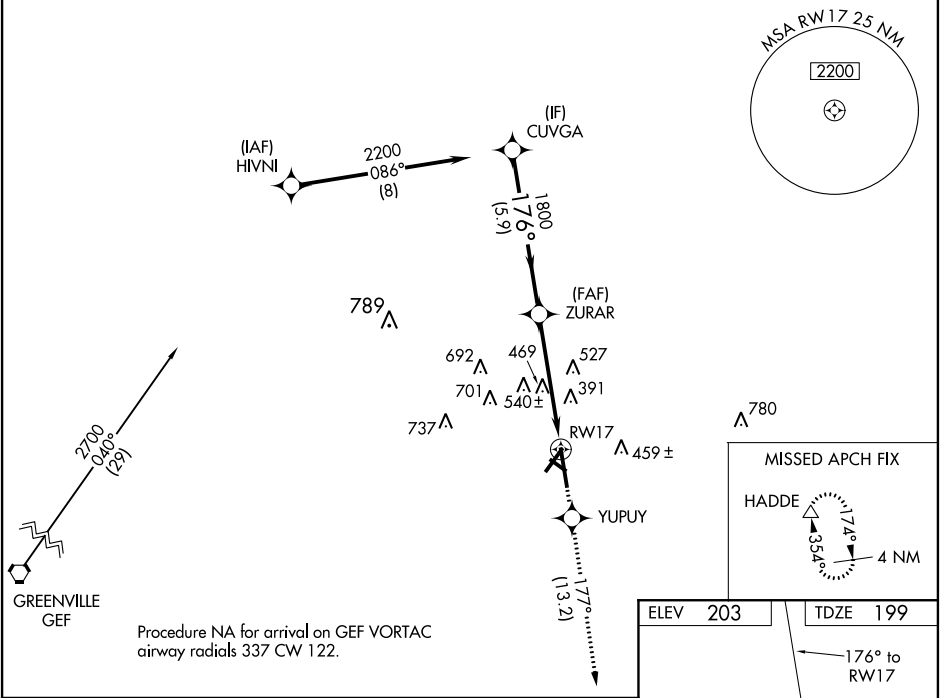

CATEGORY	A	B	C	D
LPV DA		454-3/4	255 (300-3/4)	
LNAV/VNAV DA		458-7/8	259 (300-7/8)	
LNAV MDA	720-1	521 (600-1)	720-1 1/2	521 (600-1 1/2)
CIRCLING	720-1	517 (600-1)	720-1 1/2	780-2 577 (600-2)

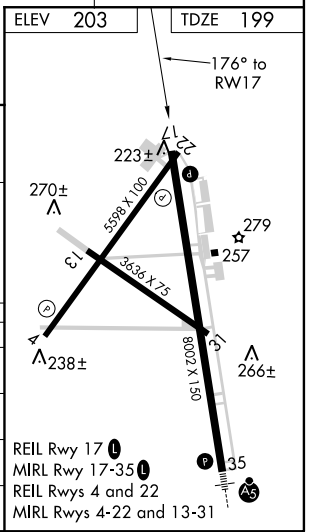

SE-4, 08 NOV 2018 to 06 DEC 2018

SE-4, 08 NOV 2018 to 06 DEC 2018