


VOR/DME OTK 114.8 Chan 95	APP CRS 338°	Rwy Idg 8002 TDZE 200 Apt Elev 203
---	------------------------	---

VOR RWY 35

VALDOSTA RGNL (VLD)


For inoperative MALSR, increase S-35 Cats A/B visibility to 1 mile. ASMUC fix minimums: increase S-35 Cats A/B/C visibility to 1 mile and Cat D to 1 1/4 mile. Visibility reduction by helicopters NA. VDP NA with Moultrie altimeter setting. If local altimeter setting not received, use Moultrie altimeter setting and increase all MDAs 100 feet and visibility Cats C and D 1/2 mile.

MALSR




MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 direct OTK VOR/DME and hold, continue climb-in-hold to 2000.

ASOS 126.225	VALDOSTA APP CON * 126.6 285.6	VALDOSTA TOWER * 120.9 (CTAF) 0	GND CON 121.7	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

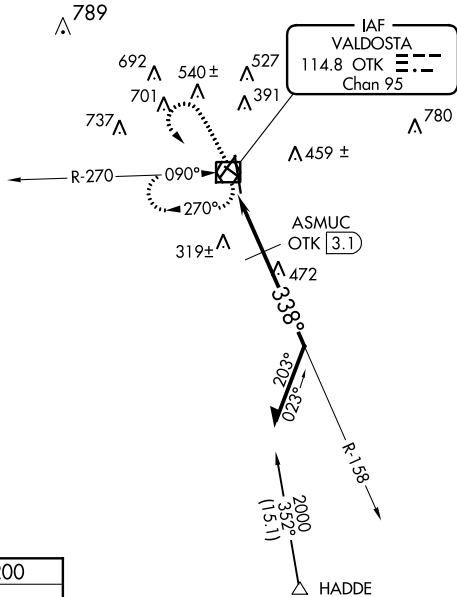

ELEV 203	TDZE 200
----------	----------

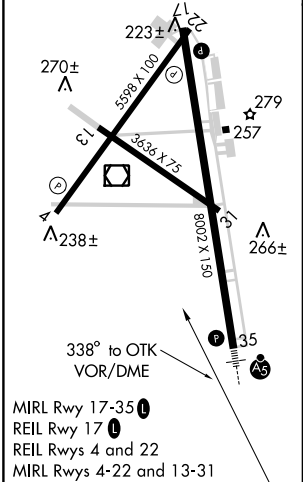

1200	2000	OTK	OTK VOR/DME	Remain within 10 NM
↑	↙	☐	158°	
			338°	
			780*	
			0.8 NM	1.3 NM

* 880 when using Moultrie altimeter setting.

CATEGORY	A	B	C	D
S-35	780-3/4	580 (600-3/4)	780-1 580 (600-1)	780-1 1/4 580 (600-1 1/4)
CIRCLING	780-1	577 (600-1)	780-1 1/2 577 (600-1 1/2)	780-2 577 (600-2)
ASMUC FIX MINIMUMS				
S-35	580-3/4	380 (400-3/4)		580-1 380 (400-1)
CIRCLING	640-1 437 (500-1)	660-1 457 (500-1)	660-1 1/2 457 (500-1 1/2)	780-2 577 (600-2)

SE-4, 22 JUN 2017 to 20 JUL 2017

SE-4, 22 JUN 2017 to 20 JUL 2017