ILS or LOC RWY 26R

GEORGE BUSH INTCNTL/HOUSTON (IAH)

LOC/DME I-OND	APP CRS	Rwy Idg	9000
111.55	267°	TDZE	95
Chan 52 (Y)		Apt Elev	96

DME required. From HOOTI: RNAV 1-GPS required.

Simultaneous approach authorized with Rwy 26L and Rwy 27. For inop ALS, increase S-ILS 26R Cat E visibility to RVR 4000, and S-LOC 26R Cat C/D/E visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 on IAH VORTAC R-344 to PEPBI INT/ IAH 20 DME and hold.

D-ATIS	HOUSTON APP CON	HOUSTON TOWER	GND CON	CLNC DEL	CPDLC
124.05	120.05 379.1 EAST 124.35 316.15 WEST	120.725 290.2	118.575	128.1	

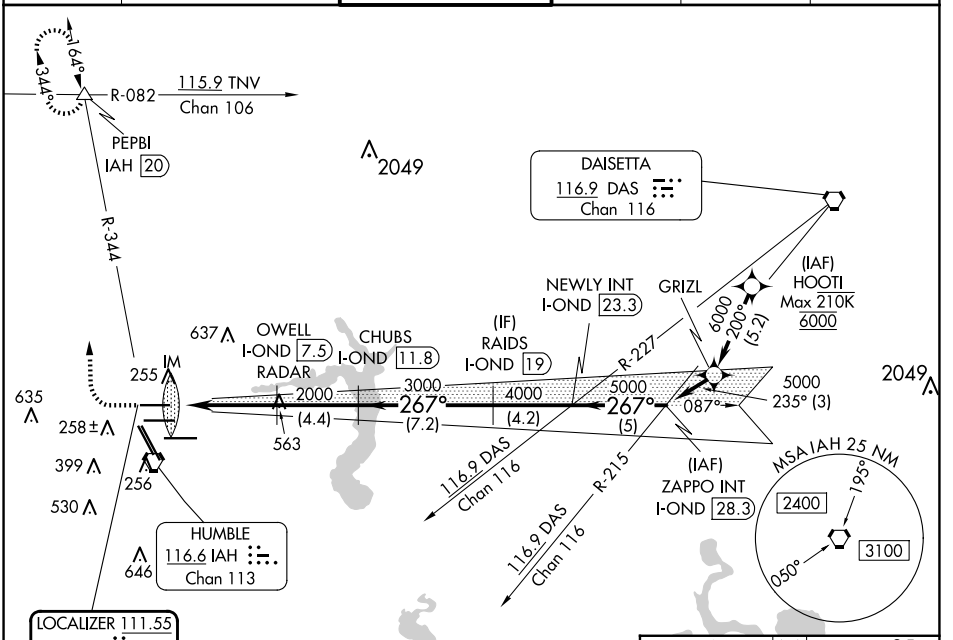

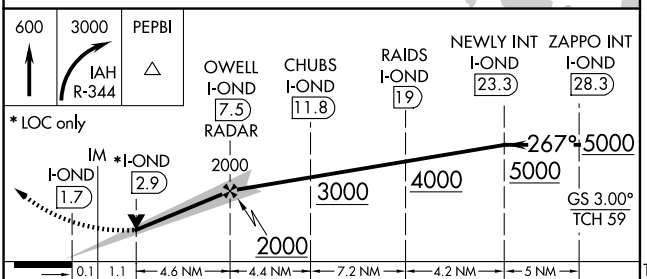

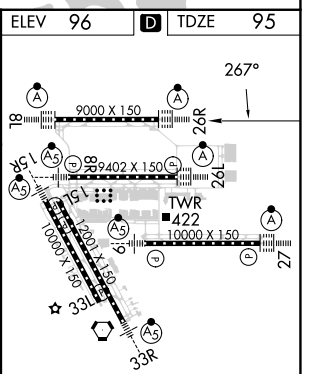

TDZ/CL Rwys 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwys

CATEGORY	A	B	C	D	E
S-ILS 26R	295/18 200 (200-½)				
S-LOC 26R	580/24 485 (500-½)		580/50 485 (500-1)		

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SC-5, 15 MAY 2025 to 12 JUN 2025
SC-5, 15 MAY 2025 to 12 JUN 2025